



# Caiman CSP 6ft Single

CCT Colour Switchable

## Features

IK rating	IK08
IP rating	IP65
CSP Switchable	CCT Switchable
Sensor Option	On-Off Microwave sensor & daylight switching available
Dimmable Option	DALI-2 and 0-10V Dimmable
LED Lifetime	50,000h L70
CRI	80 Ra
SDCM	4 SDCM
Emergency Option	Yes

## Installation information

Install Connector Type	Loop in / Loop out
Inrush Current	30A 0.3ms
Construction Material	Anti-UV Polycarbonate
Maximum Ambient Temperature	-20°C to +40°C
SELV	Yes
UK Building Regulations	Part P
Electric Class (1, 2, 3)	1

## Photometrics @ 25°C

Product code	Finish	Feature I	W	Colour	Beam	lm	lm/W	EM
AC6SN	Grey RAL7005	Standard	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	N/A
AC6SNE	Grey RAL7005	Emergency	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	250lm
AC6SNM	Grey RAL7005	On-Off Microwave Sensor	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	N/A
AC6SNME	Grey RAL7005	Emergency	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	250lm
AC6SV	Grey RAL7005	0-10V Dimmable	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	N/A
AC6SVE	Grey RAL7005	Emergency	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	250lm
AC6SD	Grey RAL7005	DALI-2 Dimmable	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	N/A
AC6SDE	Grey RAL7005	Emergency	36W	3000K - 4000K - 6500K	120°	4140lm - 4680lm - 4500lm	115lm/W - 130lm/W - 125lm/W	250lm

## Wiring information

Cable Required for Connector	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm <sup>2</sup>
Type of Wiring Required	Parallel



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled  
 /collingwoodlighting  
 collingwoodlighting

## Guarantee

5 years, 2 years on battery, 2 years on-site

## Features & benefits

CCT switchable between 3000K, 4000K & 6500K

Grade 316 Coastal protection kit available

BESA mounting kit available

IP65 for the highest level of dust protection and able to withstand jets of water from any directions

304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing

IK08 for robust impact protection


Unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.

Extended mounting sliders to help make refurbishment easier

Safety tether cable to gear tray enables fast installation

Compression cable gland included in fixings kit

Beam angle: 120°

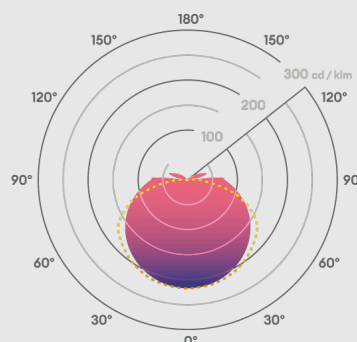

1854mm  
51mm  
80mm


### Accessories


<b>AC6SCLIP316</b>	Coastal application kit	Sold Separately
<b>ACSBESA</b>	BESA mounting kit (indoor only)	Sold Separately
<b>EMBOLTMOPEN</b>	3 hour emergency conversion pack, open area, manual test	Sold Separately
<b>EMBOLTMCOR</b>	3 hour emergency conversion pack, corridor area, manual test	Sold Separately
<b>SSENPBSTWH</b>	PIR on/off daylight Sensor	Sold Separately



collingwood

01604 495 151  
[collingwoodlighting.com](http://collingwoodlighting.com)

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

---

### Caiman CSP 6ft Single

IP65 for the highest level of dust protection and able to withstand jets of water from all directions. 304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing. IK08 for robust impact protection. Our Caiman anti-corrosive has been designed for the most demanding applications and features a colour temperature switch so you can choose for your light to be warm, cool or daylight. We also feature unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.