



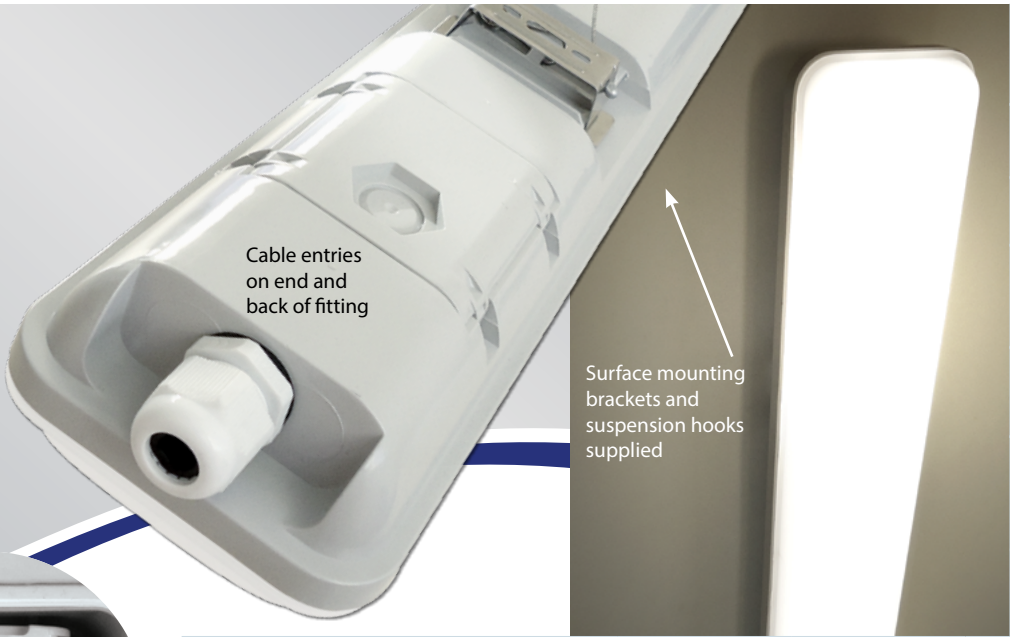

5
Year Warranty






Push fit terminals

ECONOMY LED WEATHERPROOF FITTINGS

- Polycarbonate diffuser • ABS housing
- Multiple fixing options - supplied with surface mounting brackets and suspension hooks
- Push fit terminal connections
- Temporary suspension option for easy installation
- Cable entries on end and back of fitting



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECO5WPSI2	5ft Single	30W	4000K	2900 lm	40,000 hrs	IP65	1 / 6
VECO5WPTW2	5ft Twin	45W		4300 lm			
VECO6WPSI2	6ft Single	48W		4500 lm			
VECO6WPTW2	6ft Twin	65W		6200 lm			



LED LAMP SPECIFICATIONS:	5FT SINGLE	5FT TWIN	6FT SINGLE	6FT TWIN
Luminaire lumens (with diffuser)	2900 lm	4300 lm	4500 lm	6200 lm
Lumens from chip (no diffuser)	3250 lm	5100 lm	5300 lm	7250 lm
Useful lumens	2700 lm	4000 lm	4300 lm	5900 lm
Rated Wattage	30W	45W	48W	65W
Rated luminous flux	2700 lm	4000 lm	4300 lm	5900 lm
Nominal life time of the lamp	40,000 hrs	40,000 hrs	40,000 hrs	40,000 hrs
Colour temperature	4000K	4000K	4000K	4000K
Number of switching cycles before premature lamp failure	15,000	15,000	≥15,000	≥15,000
Warm-up time up to 60% of the full light output	<1s	<1s	<1s	<1s
Dimmable	No	No	No	No
Nominal beam angle	120°	120°	120°	120°
Rated power	30W	45W	48W	65W
Rated lamp lifetime	40,000 hrs	40,000 hrs	40,000 hrs	40,000 hrs
Lamp power factor	>0.9	>0.9	>0.9	>0.9
Lumen maintenance factor at end of nominal life	≥0.70	≥0.70	≥0.70	≥0.70
Starting time	Instant full light	Instant full light	Instant full light	Instant full light
Colour rendering	≥80	≥80	≥80	≥80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	911cd	1223cd	1316cd	1757cd
Rated beam angle	120°	120°	120°	120°
Voltage / Frequency	240V~50Hz	240V~50Hz	240V~50Hz	240V~50Hz
Not suitable for accent lighting				