


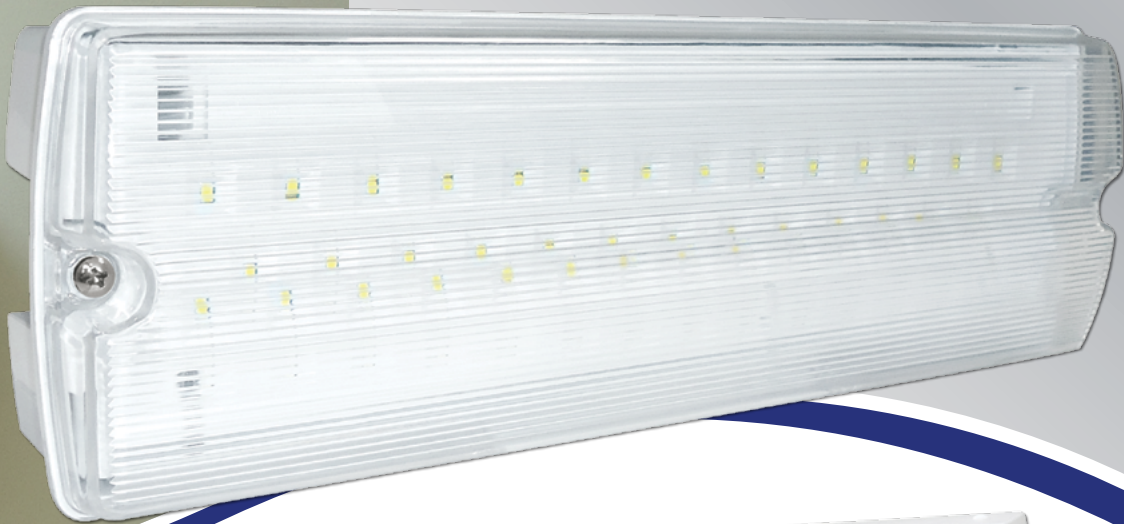

Hinged gear tray

LED EMERGENCY BULKHEADS

Low energy alternative to standard fluorescent emergency bulkheads - perfect for office, commercial and industrial applications


- Polycarbonate construction • Internal or external use • 20mm gland entries as standard
- Hinged gear tray & push fit terminal block: allows for quicker and easier installation and maintenance
- Minimum 3 hour functionality in emergency mode • High output LEDs with bright white light
- Semi recessed fixing option available: BULKFRAME allows a more discreet installation option
- Dedicated self adhesive legend pack included with a combination of symbols: allows multiple exit path designation options
- Additional legend sets available: ISOLGDSET (ISO 7010 format) / LGDSET (signs directive format) which can be used as additional legend sets or as individual stickers for walls and doors
- Battery - Ni-Cd 3.6V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB1

MAINTAINED VERSIONS:

- Facility for remote switching and non-maintained mode

BULKFRAME:


- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm



Signs Directive



ISO 7010



BULKFRAME

| Code           | Version / Legend Set Included | Wattage | Colour Temp. | Avg. Rated Life (Hrs) | Lumens                             | IP Rating | Viewing Distance | MOM / OPQ |
|----------------|-------------------------------|---------|--------------|-----------------------|------------------------------------|-----------|------------------|-----------|
| Maintained     |                               |         |              |                       |                                    |           |                  |           |
| EML3MISO       | ISO 7010                      | 7W      | 6000K        | 30,000 hrs            | 235 lm (mains)<br>150 lm (battery) | IP65      | 20m              | 1 / 12    |
| EMLED3M        | Signs Directive               |         |              |                       |                                    |           |                  |           |
| Non Maintained |                               |         |              |                       |                                    |           |                  |           |
| EML3NMISO      | ISO 7010                      | 2W      | 6000K        | 30,000 hrs            | 150 lm                             | IP65      | 20m              | 1 / 12    |
| EMLED3NM       | Signs Directive               |         |              |                       |                                    |           |                  |           |
| Accessories    |                               |         |              |                       |                                    |           |                  |           |
| BULKFRAME      | White Bulkhead Frame          |         |              |                       |                                    |           |                  | 1 / 12    |
| ISOLGDSET      | ISO 7010 Legend Set           |         |              |                       |                                    |           |                  | 12 / 12   |
| LGDSET         | Signs Directive Legend Set    |         |              |                       |                                    |           |                  | 12 / 12   |



5  
Year Warranty



IP65

