CATALOGUE RANGE: ■ Garden Lighting ✓ Lighting design service available



aabaaaa

PIR Controls




Everyday Lighting For Professionals

6W PLASTIC LED WALL LIGHT


- Polycarbonate construction suitable for coastal areas • Opal diffuser
- Integral driver
- Downward facing opal diffuser gives a pleasing wall washed effect

PIR VERSIONS:

- PIR Time on adjustment 5 secs 8 mins
- 160° detection angle
- 8 meter detection range
- Lux level adjustments option for day and night time operation or night time operation

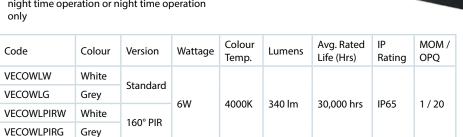







0

LED LAMP SPECIFICATIONS:	
Luminaire lumens (with diffuser)	340 lm
Lumens from chip (no diffuser)	600 lm
Useful lumens	320 lm
Rated Wattage	6W
Rated luminous flux	320 lm
Nominal life time of the lamp	30,000 hrs
Colour temperature	4000K
Number of switching cycles before premature lamp failure	15,000
Warm-up time up to 60% of the full light output	<0.5s
Dimmable	No
Nominal beam angle	108°
Rated power	6W
Rated lamp lifetime	30,000 hrs
Lamp power factor	>0.5
Lumen maintenance factor at end of nominal life	80
Starting time	<0.5s
Colour rendering	≥80
Colour consistency	Within a six step Macadam ellipse
Rated peak intensity	123cd
Rated beam angle	108°
Voltage / Frequency	240V~50Hz
Not suitable for accent lighting	

IP65