

Material number	0 601 64J 007
EAN	3165140625289
1 x reciprocating saw blade S 123 XF, Progressor for Metal available separately as set of 2: 2 608 654 416	✓
1 x reciprocating saw blade S 2345 X, Progressor for Wood available separately as set of 2: 2 608 654 403	✓
1/1 L-BOXX inlay for tool and charger 1 600 A00 2UZ, 1 600 A00 2VF	✓
L-BOXX 238 1 600 A00 1RS	✓



Technical data


Technical data

Stroke lengths	28 mm
Battery voltage	18 V
Stroke rate (1st gear / 2nd gear)	2,400 - 2,700 spm
Packaging dimensions (width x length x height)	370 x 440 x 250 mm
Weight incl. battery	3,4 kg



Noise/vibration information

Sound pressure level	77 dB(A)
Sound power level	88 dB(A)
Uncertainty K	3 dB

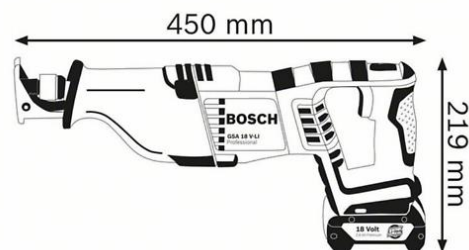

Sales information

Positioning

- Best-in-class cutting performance

User benefit

- Cut over 100 spruce beams (100 x 100 mm) to length with only one battery charge
- Electronic Motor Protection (EMP) protects the motor against overload and ensures a long lifetime
- Easy handling: Easy and fast saw blade changes due to SDS mechanism