



- General commercial use

CONSTRUCTION

- Side-lit design with LEDs housed in frame
- MS light guide plate
- Two TP(b) rated UV stable PS front cover options:
- Opal diffuser
- Micro-prismatic controller for UGR<19 compliant lighting schemes
- Supplied complete with loop-in / loop-out connection block for quick installation

- Choice of 600x600 or 1200x600
- Opal
- 600x600, 29W, 3,540 lm, 122 l.lm/c.W - 1200x600, 54.7W, 6,780, 124 l.lm/c.W
- Micro-prismatic - 600x600, 29W, 3,475 lm, 120 l.lm/c.W
- CRI >80
- CCT 4000K
- CCT choice of 4000K or 5000K on opal 600x600 only
- Branded ENEC approved, flicker free, remote mounted LED driver


EMERGENCY Plug-in lithium emergency conversion packs. To be ordered separately, as listed below.

DIMMING DD (DALI or Switch Dim) available as listed.

SURFACE MOUNTING A surface mounting kit is available

SUSPENDED INSTALLATION A wire suspension kit allows up to 2m suspension

RECESSED INSTALLATION A recessed mount frame is available for fixing into plasterboard or false ceilings.

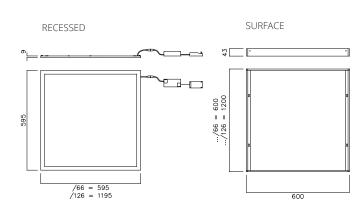

ORDER CODE	DESCRIPTION
NFU/O/66/840	Fulton Opal LED Panel 600X600 840
NFU/O/66/850	Fulton Opal LED Panel 600x600 850
NFU/O/126/840	Fulton Opal LED Panel 1200X600 840
NFU/UGR19/66/840	Fulton UGR<19 LED Panel 600X600 840
NFU/O/66/DD/840	Fulton Opal LED Panel 600X600 DD Dim 840
NFU/UGR19/66/DD/840	Fulton UGR<19 LED Panel 600X600 DD Dim 840
ACCESSORIES	
NFU/SMK/66	Fulton Surface Mount Kit for 600X600 Panel
NFU/SMK/126	Fulton Surface Mount Kit White For 1200X600 Panel
NFU/WIRE/SUSP/KIT	Fulton Wire Suspension Kit
NFU/RMF/66	Fulton Recessed Mount Frame For 600X600 Panel
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO4 for Recessed Product Ranges

