


# WALL-DOG™ SCREW ANCHOR

- An all steel, tension free, one piece threaded fastener
- Used to fasten various fixture directly to drywall, wood, concrete, sand-lime stone or brickwork
- No plug needed
- No pre-drilling required in wood, drywall or gypsum board

## SUITABLE BASE MATERIALS

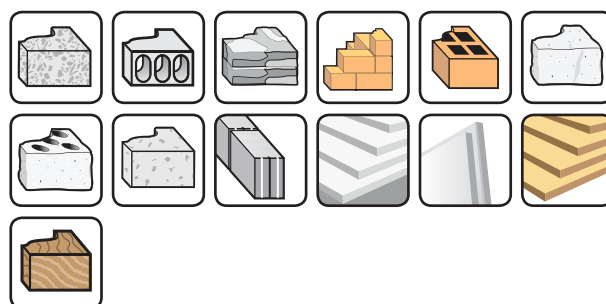

DFM4250000

DFM4240150

DFM4270000




Cat No.	Description	Length [mm]	Head Size [mm]	Pack Quantity	Carton Quantity
DFM4240150	Wall-Dog Countersunk Head 32 - Chrome	32	8	100	1600
DFM4250000	Wall-Dog Pan Head 32 - Chrome	32	8	100	1600
DFM4270000	Picture Puppy - #2 Phillips Head	30	8	100	1600


## RECOMMENDED LOAD - CONCRETE

Description	$h_{nom}$ [mm]	$d_0$ [mm]	$t_{fix}$ [mm]	$N_{rec}$ [kN]	$V_{rec}$ [kN]
Wall-Dog Countersunk Head 32 - Chrome	29	5	3	0.3	0.8
Wall-Dog Pan Head 32 - Chrome	29	5	3	0.3	0.8
Picture Puppy - #2 Phillips Head	30	5	-	0.3	0.3


## INSTALLATION




1.) For fastening into wallboard or wood no pre-drilling is required.




2.) The anchor is inserted through the fixture and screwed in with an ordinary Phillips screwdriver.




1.) Drill hole into to the specified depth with the appropriate drill bit size




2.) Blow the hole clean of dust and debris.




3.) Place fixture over the anchor. Insert screw and tighten flush with fixture.




4.) The anchor is inserted through the fixture and screwed in with an ordinary Phillips screwdriver.




1.) For fastening into wallboard or wood no pre-drilling is required.




2.) The anchor is inserted through the fixture and screwed in with an ordinary Phillips screwdriver.




3.) Position picture hanging wire over recessed area of anchor.




1.) Drill hole into to the specified depth with the appropriate drill bit size



2.) Blow the hole clean of dust and debris.



3.) Insert screw and tighten with an ordinary Phillips screwdriver flush with wall.



4.) Position picture hanging wire over recessed area of anchor.