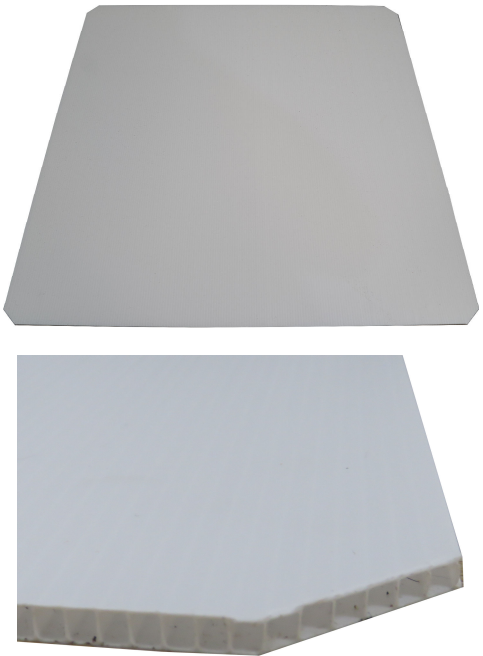


CPT1 Product Data Sheet

Product Range	Ceiling Pattress	Image for reference only 
Description	Ready to install ceiling tile pattress for use with MDCRB2WH circular dry lining box	
Key Features	Alternative to plywood pattress Maximum load 5Kg when used with rigid ceiling tiles Flame retardant Good heat resistance Good fatigue resistance Light Weight (373g) Easy to Cut on Site Pre-chamfered edges to aid installation Recyclable	
Dimensions	595 x 595 x 4mm	
Material(s)	Twin walled polypropylene	
Compliance / Standards(s)	REACH Compliant DIN 4102 Class B1 UL94 V2 (reduced to V2 because of droplets, otherwise V0 behaviour) ASTM D635 Burning Time Less than 5 seconds BS 4662:2006+A1:2009 15.4.3.3 - Pass BS 2782 Method 508A – Pass UK Building Regs Part B	
Packaging	Recyclable	