


Wall mounted socket - Part no. 143



- screw terminals
- Products with pilot contact: Part no. + index P

Protection type	IP 67
Ampere	125A
Poles	5p
Voltage	400V
Hertz	50-60 Hz
Earth position	6h
Contact	standard
Connection technology	Screw terminals

Std. Pack. 3 Qty.

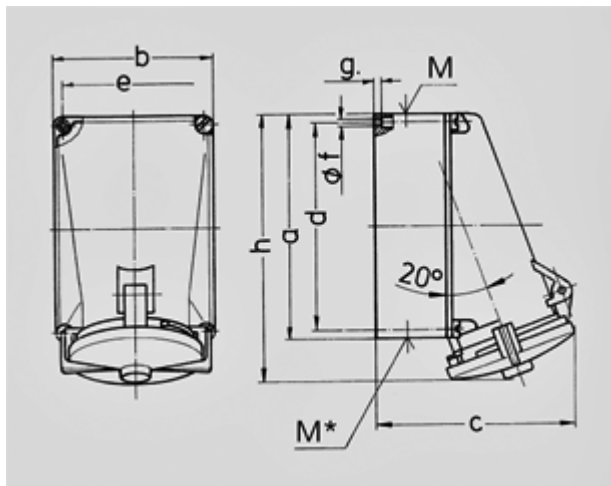

Drawing	Amp.	125	
1 MB 162	Poles	4	5
Dim. in mm	a	264	264
	b	163	163
	c	203	203
	d	240	240
	e	140	140
	f	8,1	8,1
	g.	8	8
	h	313	313
	M	50	50
	M*	50	50
Max. cable diam. (mm)		38	38
Terminal for cond. cross		25	25
section (mm²) min.-max.		—35	—35