

Industrial Plugs & Sockets

Combination Units

- All components mounted on enclosure back plate for ease of wiring.
- Switched interlock means the device cannot be switched on until plug is fully inserted. The plug cannot be withdrawn when the switch is in 'ON' position.
- Top and bottom cable entry with pre-cut metric thread.
- All units internally pre-wired.
- Good sealing through foamed seal.
- IP44 (IP67 available).
- Additional configurations available to order.
- RCDs are mechanically latched.
- Conform to IEC 61439 where applicable.

See Custom Build Helpline on page 193.




Socket and RCD Ratings

- 16A = 25A 30mA Triple Pole RCD
- 32A = 40A 30mA Triple Pole RCD
- 63A = 63A 30mA Triple Pole RCD



High quality isolator used with padlockable handle in 'OFF' position

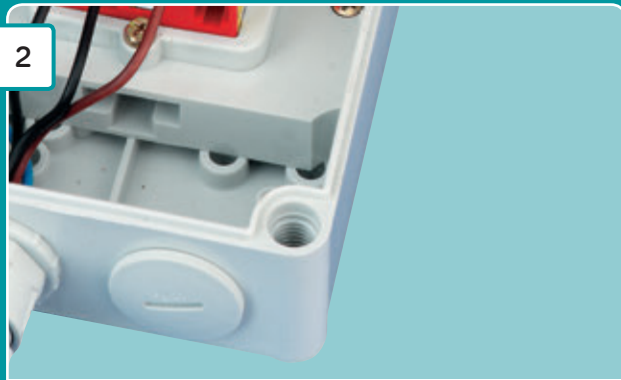

Enclosure fixings outside of sealed enclosure interior to maintain IP rating



Corrosion resistant synthetic screws (refer to individual modules for variations)



Hinged cover opens from front reducing risk for dust and moisture ingress