

Intruder Alarm Door Contacts



FB7

Grade 1, 5 Screw, Single Reed, Flush Contact

- 2 nickel screws to govern the reed switch
- 3 spare brass screws for any custom requirements
- Operating Gap 14mm
- Requires a 20mm dia hole
- Plate dimensions 36mm x 22mm



FB8/RS

Grade 2, Roller Shutter Contact, Single Reed 457mm


- Cable protected by armored sleeving
- Dimensions: 150mm x 40mm x 15mm
- Operating Gap: 50mm
- IP67
- Aluminum



FB8

Grade 1, 5 Screw, Single Reed, Surface Contact

- 2 nickel screws to govern the reed switch
- 3 spare brass screws for any custom requirements
- Operating Gap 20mm
- Both parts are 67mm x 14mm x 13mm

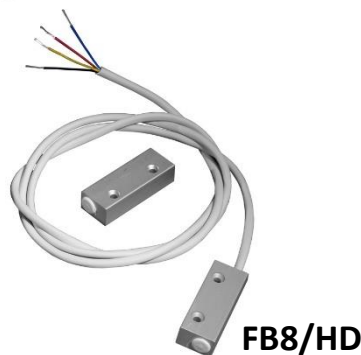

FB8/HD

Grade 2, 4 Core, Single Reed, Potted, Aluminum, Surface

- Ideal for fitting on patio doors
- The internals of the contact are sealed for environmental/tamper protection, with a 1m length of 4 core fly lead provided for wiring
- Comes complete with fitting screws
- 15 mm operating Gap
- Both parts are 35mm x 15mm x 10mm

***A Range of Intruder Alarm contacts
to cover most common situations***

For further information contact:

Securefast plc

6, The Cedars Business Centre
Avon Road, Cannock
Staffordshire
WS11 1QJ



Call > +44 (0) 1704 502 801

Email > sales@securefast.co.uk

Visit > www.securefast.co.uk