

# DATASHEET


**Hamilton**<sup>®</sup>

making connections beautifully

**Code:** MOD-TCSW

## EuroFix | EUROFIX RANGE | Telephone and Data Outlets Modules

### Product Image

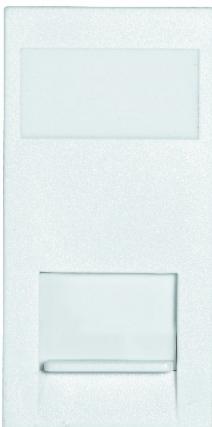

### Wiring

Pin No.	BT Wiring Schedule Colour Codes: Striped Wires
1	GREEN / White
2	BLUE / White
3	ORANGE / White
4	WHITE / Orange
5	WHITE / Blue
6	WHITE / Green

Incoming Telephone Cable  
On 4 wire systems, Pin 1 and 6  
are not connected.

The maximum REN that can be connected to any one exchange line is 4. Any number of sockets may be connected. All sockets are connected in parallel. ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in the diagram above.


### Dimensions

**Hamilton**<sup>®</sup>

EUROFIX

MOD-TCS

25x50mm Module Telephone Slave

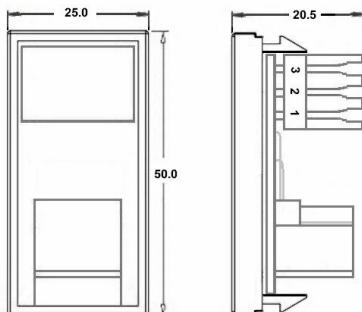

<b>Insert Type</b>	25x50mm Module Telephone Slave
<b>Insert Colour</b>	White
<b>EAN13 Barcode</b>	5017504980658
<b>Commodity Code</b>	85176990
<b>Luckins TSI</b>	387397232
<b>ETIM Class</b>	EC000018
<b>Dimensions(Nominal)</b>	Module: Height = Width = Depth =
<b>Weight</b>	11 GR
<b>Switched Poles</b>	N/A
<b>Current Rating</b>	n/a
<b>IP Rating</b>	IP2XD
<b>Contact Gap Minimum</b>	N/A
<b>Earth Terminal Capacity 1</b>	5x1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	4 x 1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	1 x 4mm <sup>2</sup> Multi-strand
<b>Earth Terminal Capacity 5</b>	1 x 6mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed (ref BS7671 415.2.1)
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS 6312:2:2
<b>Additional Notes</b>	Note Mains operated and extra low voltage products must not be installed in the same face plate aperture. When installing within the same back box a suitable phase barriers MUST be used to separate the two voltages. See BS 7671 Wiring regulations for further details.
<b>Patents And Trade Marks</b>	EuroFix is a Registered Trade Mark No. 2560270

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

**T:** +44 (0)1747 860088

**E:** [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | **W:** [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

(WEB)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 13/06/2023 E&OE