


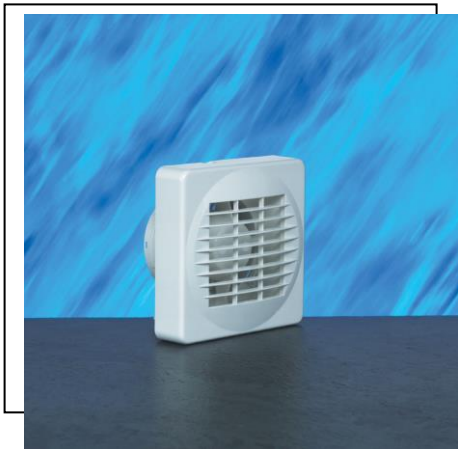

Product Description

Axial extract fan with adjustable electronic overrun timer (the factory setting is 15 min). Suitable for panel mounting or wall/window mounting using the appropriate accessory kit.

Key Features

- Wall or ceiling mounting
- All non pull-cord variants can be ceiling mounted
- High quality ABS mouldings
- With external gloss finish
- Quiet Operation

Technical Specification

Meets the requirements of Building Regulation Document F.

IP44 rated, GS Approved, and CE marked in accordance with all the relevant EEC Harmonised Directives.
Double Insulated, class II motor fitted with Thermal Protection.

Whole Diameters: Window 105mm

Wall 115mm

Airflow: Panel Mount 88³m/hr

Installed 69³ m/hr

Product Range Details

Rated Voltage 220-240v-50Hz

Rated wattage 16 watts

Motor speed 2100rpm

Noise Level 30dBA

Height - 154mm

Width - 154mm

Depth - 47mm

Accessories Available

Window kit, wall kit, external wall grille, external gravity grille, ducting

Performance Graph

