

PEX® BW Brass Cable Gland Pack


2 PART INDOOR

Application: Brass indoor gland suitable for all types of steel wire armoured cable (SWA), providing mechanical cable retention and electrical continuity via armour wire termination.

Operating temp: -80°C to +300°C

Ingress protection: IP2X EN60529

Approval: BS 6121 Part 1:2005

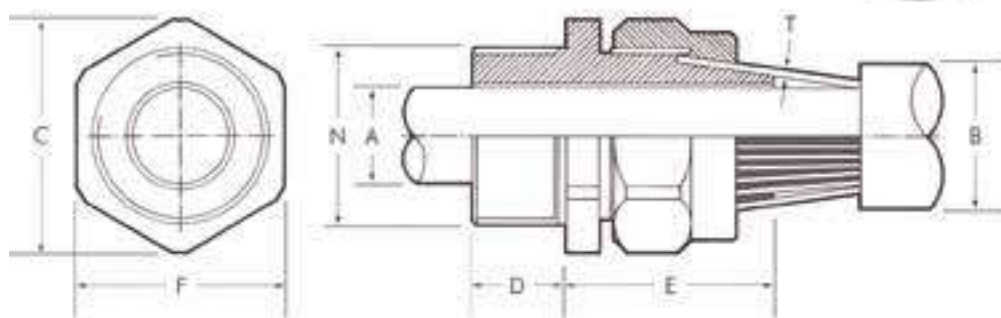

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details		Assembled Length
		Diameter N	Length D	Diameter A max	Diameter B max	Armour wire size T	A/F F	A/C C	E
PBW20S* PACK	2	20	10	11.8	15.8	0.90/1.25	22.0	24.4	16.0
PBW20* PACK	2	20	10	13.8	19.5	0.90/1.25	25.0	27.7	17.0
PBW25* PACK	2	25	10	19.8	27.0	1.25/1.60	33.0	36.6	18.0
PBW32* PACK	2	32	10	26.4	33.5	1.60/2.00	40.0	44.4	21.0
PBW40* PACK	1	40	15	32.4	40.1	1.60/2.00	48.0	53.3	23.0
PBW50S* PACK	1	50	15	38.0	46.3	2.00/2.50	56.0	62.2	24.0
PBW50* PACK	1	50	15	44.0	52.6	2.00/2.50	62.5	69.4	25.0
PBW63S* PACK	1	63	15	49.0	61.5	2.50	70.0	77.7	26.0
PBW63* PACK	1	63	15	56.2	65.5	2.50	76.0	84.4	28.0
PBW75S* PACK	1	75	20	62.0	71.6	2.50	85.0	94.4	36.0
PBW75* PACK	1	75	20	69.0	78.0	2.50	90.0	100.0	36.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud.

*Add LSF to the Part No. for Low Smoke & Fume version, i.e. **PBW20SLSF PACK**

See page 60 for more information on Earthing Nuts™

