

### PEX® CW Brass Cable Gland Pack


#### 4 PART OUTDOOR

**Application:** Brass indoor and outdoor 4 part cable gland suitable for all types of steel wire armoured cable (SWA), providing an environmental seal on the outer cable sheath. The gland also provides mechanical cable retention and electrical continuity via armour wire termination.

**Operating temp:** -20°C to +80°C

**Ingress protection:** IP66 EN60529

**Approval:** BS EN 62444:2013

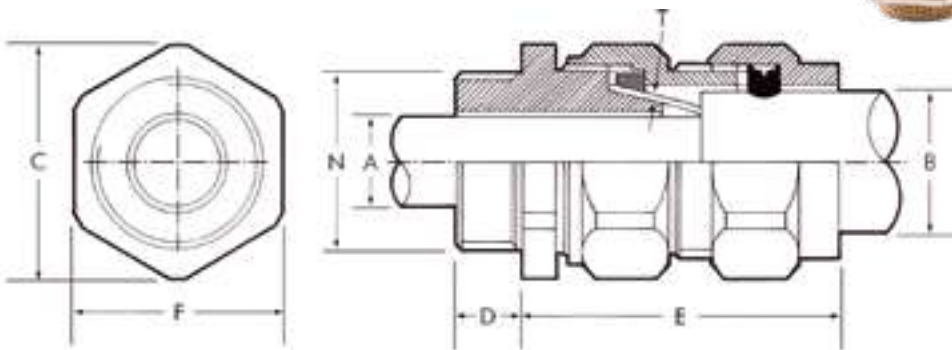

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details				Assembled Length
		Diameter N	Length D	Diameter A max	Diameter B min max	Armour wire size T	Body & Back Nut		Compression Nut		E
							A/F F	A/C C	A/F J	A/C K	
<b>PCW20S* PACK</b>	2	20	10	11.8	12.9 - 15.8	0.90/1.25	23.0	25.6	24.0	26.7	38.0
<b>PCW20* PACK</b>	2	20	10	13.8	15.5 - 20.5	0.90/1.25	26.0	28.9	28.0	31.1	39.0
<b>PCW25* PACK</b>	2	25	10	19.8	20.3 - 27.0	1.25/1.60	34.0	37.7	35.5	39.5	45.0
<b>PCW32* PACK</b>	2	32	10	26.4	26.7 - 33.5	1.60/2.00	42.0	46.8	46.0	51.2	48.0
<b>PCW40* PACK</b>	1	40	15	32.4	33.0 - 40.1	1.60/2.00	50.0	55.7	55.0	61.0	53.0
<b>PCW50S* PACK</b>	1	50	15	38.0	39.8 - 46.3	2.00/2.50	62.0	69.1	65.0	72.4	59.0
<b>PCW50* PACK</b>	1	50	15	44.0	46.0 - 52.6	2.00/2.50	62.0	69.1	65.0	72.1	59.0
<b>PCW63S* PACK</b>	1	63	15	49.0	52.3 - 61.5	2.50	76.0	84.7	80.0	89.2	66.0
<b>PCW63* PACK</b>	1	63	15	55.5	58.4 - 65.3	2.50	76.0	84.7	80.0	88.8	66.0
<b>PCW75S* PACK</b>	1	75	20	62.0	64.8 - 73.0	2.50	85.0	94.5	90.0	100.0	68.0
<b>PCW75* PACK</b>	1	75	20	67.0	71.0 - 78.0	2.50	90.0	100.0	95.0	105.5	68.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud.

\*Add LSF to the Part No. for Low Smoke & Fume version, i.e. **PCW20SLSF PACK**

See page 60 for more information on Earthing Nuts™

