

Anna Vario

Recessed LED Panel

New



Low glare and calm, Anna Vario is the universal talent for desk space environments

- Gentle, soft and glare free lighting (UGR <19)
- Three colour temperatures in one product - simply select 3000 K (warm white), 3500 K or 4000 K (neutral white) to suit the application use
- Even surface and IP44 (from below) for hassle-free cleaning
- Easy, quick and tool-free installation thanks to an integrated connector with a 4-pole push-terminal (for up to 2.5 mm² wires) enabling loop-in loop-out wiring
- The fully detachable connector allows for first fix wiring and high voltage circuit testing whilst the luminaire is detached from the connector
- Suitable to use with the Just Emergency PLUG&PLAY E3 KIT for 3 hours emergency operation (separately available)



CCT switch
(3000 K, 3500 K
and 4000 K)



3750 lm,
110 lm/W



596 × 596 mm
622 × 622 mm
1196 × 296 mm



UGR <19:
gentle, soft
and glare-
free lighting
for office
applications



IP44
(from below):
Splash resistant
for hassle-free
cleaning



50 000 h life-
time before
luminous flux
is reduced to
80 % of the
initial value

Ideal for ...




Offices and
meeting rooms



Schools and
universities



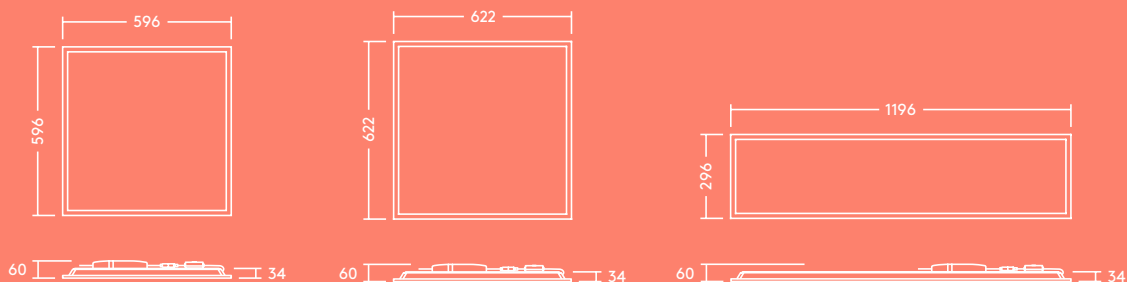


Lighting distribution

110 lm/W



Anna Vario 3750lm
cd/klm ULOR: 0 %
DLOR: 100 %
LOR: 100 %



Light source information

- 596 × 596 & 622 × 622:
3000K: 3500lm/34W
3500K: 3800lm/33W
4000K: 3750lm/34W
- 1196 × 296:
3000K: 3800lm/34W
3500K: 4000lm/33W
4000K: 4000lm/34W
- 50 000 hours rated life
(@L80, Ta 25°C)
- CRI 80
- MacAdam (initial): 4 step
- UGR < 19

Specification

- Class II electrical
- IP44 (from below),
IP20 (from above)
- IK02
- ENEC certified driver
- Ambient operating
temperature: -20 to +40°C

Installation/Mounting

- Lay-in installation in T-bar
ceiling grids
- Suitable for suspension,
surface and recessed
installation (accessories
available separately)

Material/Finish

Frame: Aluminum, white
(RAL 9003)
Diffuser: TpB rated, PET, opal
Light guide plate: PS
Backplate: Steel sheet

Ordering guide

Description	Wt (kg)	Cat. No.
ANNA VARIO Q596 3000 830/35/40	2.08	AN3000ZVK
ANNA VARIO Q596 3750 830/35/40	2.08	AN3750ZVK
ANNA VARIO 1200 × 300 4000 830/35/40	1.88	AN4000ZVK
DALI		
ANNA VARIO Q596 3750 830/35/40 HFIX	2.60	AN3750XVK
ANNA VARIO 1200 × 300 4000 830/35/40 HFIX	1.95	AN4000XVK
Accessories		
ANNA VARIO Q596 Recessed Mount Box		ANVARECBOX
ANNA VARIO Q596 Slim Surface Mount Box		ANVASURBOX
ANNA VAR 1200 × 300 Slim Surface Mount Box		ANVA12X3SURBOX
Just E3 PLUG&PLAY Kit SelfTest LiFePo4		ECOE3TLIFEKIT
830–3000K / 835–3500K / 840–4000K		

