

TITAN HIGH BAY

- 120W and 200W LED offering >93lm/W
- Alternative to HID High bay luminaires of 250W-400W
- No exposed glass so ideal for food storage areas




LHB120W & LHBFL120 LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 92.8 lm/W
 Light Distribution: A50 ↓100.0% ↑0.0%
 CIE Flux Codes: 57 95 100 100 101
 UGR 4H 8H (20%, 50%, 70%)C0 / C90: 21.8 / 21.6



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W
LHB120W	Standard	11,190	120W	93
LHB200W	Standard	19,350	200W	96



LUMINOUS INTENSITY

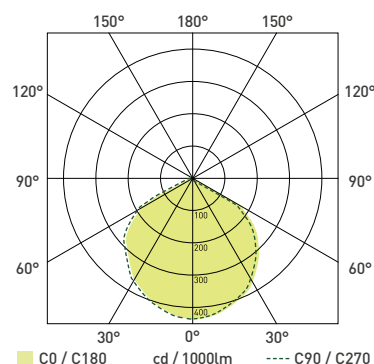

LHB120W & LHBFL120 LUMINAIRE PERFORMANCE

Light Output Ratio: 100%
 Luminaire Efficacy: 83.11 lm/W
 Light Distribution: A70 ↓100.0% ↑0.0%
 CIE Flux Codes: 91 98 100 100 97
 UGR 4H 8H (20%, 50%, 70%)C0 / C90: 14.7 / 15.0

LUMINOUS INTENSITY

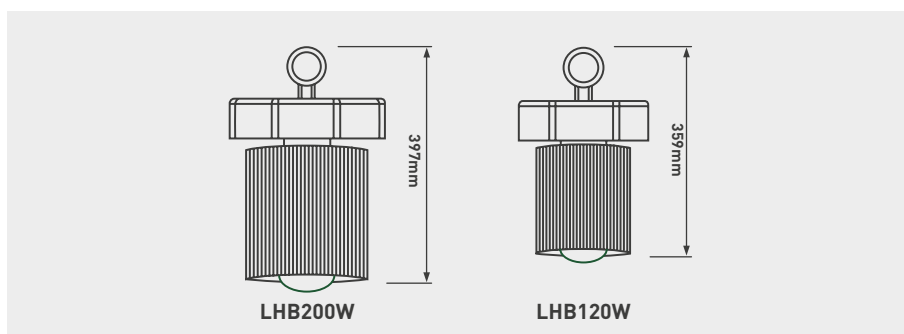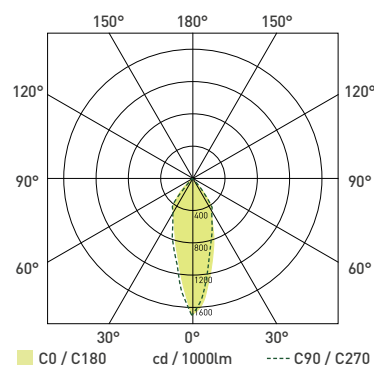

60° REFLECTOR/ REFRACTOR


- Order separately

SILVER
FINISH

POLYCARB-
ONATE
FINISH



CAT NO.	DESCRIPTION	BEAM ANGLE
LHBRFL60	Aluminium reflector	60°
LHBRFT	Polycarbonate refractor	60°

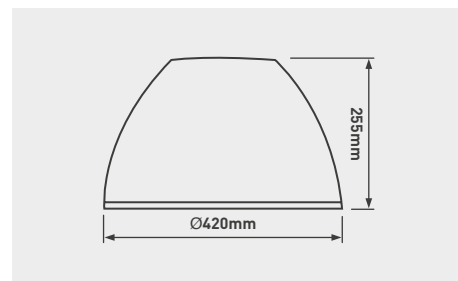


90° REFLECTOR

- Order separately

SILVER
FINISH

CAT NO.	DESCRIPTION	BEAM ANGLE
LHBRFL90	Aluminium reflector	90°

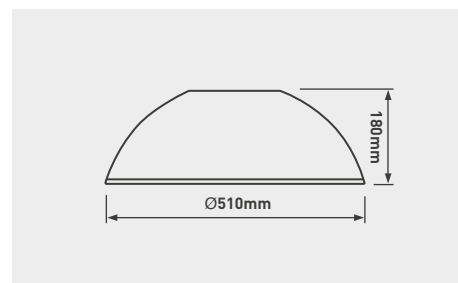

120° REFLECTOR

- Order separately

SILVER
FINISH

CAT NO.	DESCRIPTION	BEAM ANGLE
LHBRFL120	Aluminium reflector	120°

