

## Moisture-proof diffuser luminaire


An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 40% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects. 3h emergency light.

Body: polycarbonate


Diffuser: opal polycarbonate (UV stabilised)

Brackets: stainless steel

Weight: 2,2 kg

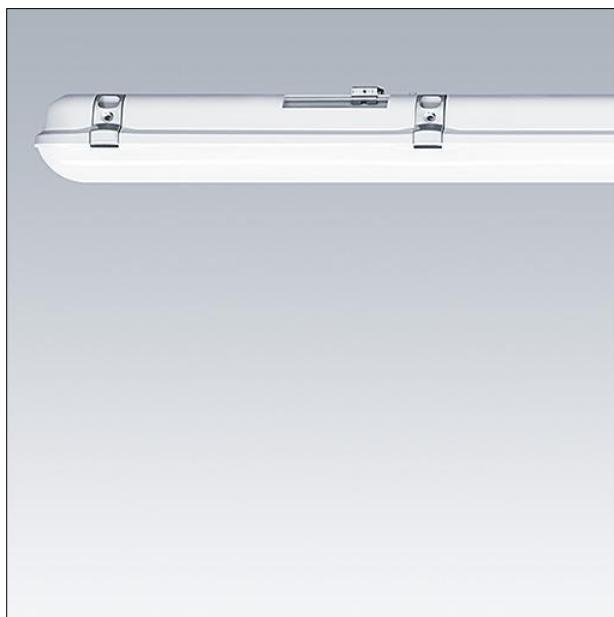

TE\_JULIE\_F\_side.jpg

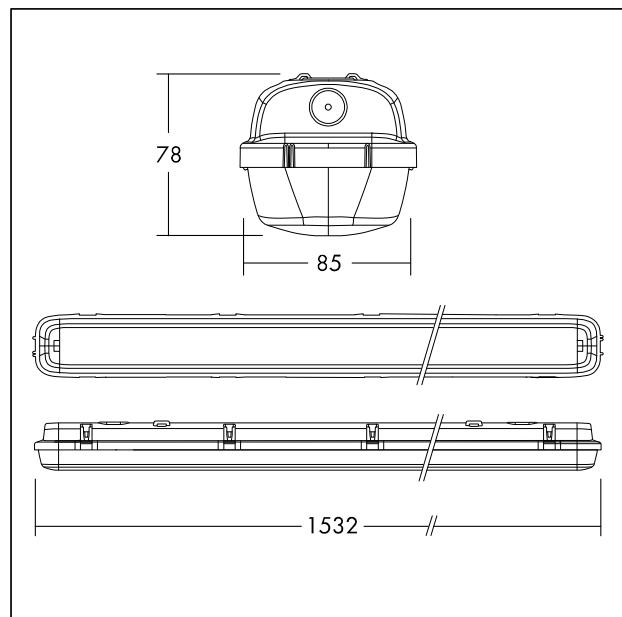

TE\_JULIE\_M\_IID2\_1500\_4000lm.wmf

## Light Distribution

## Emergency

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

IEC EN  
60598-1  
RoHS  
RG 0

UK  
CA

IP65

IK08

CE

RoHS

WEEE

REACH

850°C

T<sub>a</sub> 0  
+25