


PANEL CUT-OUT DETAILS

CAPITAL 13A SINGLE SOCKET OUTLET INTERIORS

List No	*A	B	C	D	E	F	G	H	J	K	L	M	N	P
4314/1	60.3	12.0	15.4	5.7	28.6	30.4	10.8	38.8	14.2	38.4	-	-	-	-
4314/13	60.3	12.0	15.4	5.7	28.6	30.4	10.8	38.8	14.2	38.4	23.4	16.8	16.6	10.5
7259	60.3	50.0	-	-	-	-	-	-	-	-	-	-	-	-
8255/1	60.3	24.2	14.2	38.8	38.4	14.2	-	-	-	-	-	-	-	-

* Fixing holes drill to accept 4mm countersunk screws.

Max panel thickness 1.6mm (except 7259 – 2.5mm).

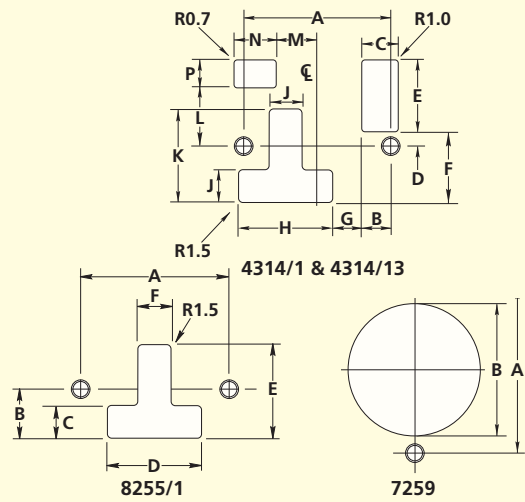


CAPITAL 13A TWIN SOCKET OUTLET INTERIORS

List No	*A	B	C	D	E	F	G	H	J	K	L	M	N
4316/1	120.6	84.4	24.7	14.2	38.8	38.4	30.4	28.6	29.9	-	-	-	-
4316/13	120.6	84.4	24.7	14.2	38.8	38.4	30.4	28.6	29.9	23.4	94.1	16.6	10.5
8257/1	120.6	60.0	21.6	14.2	38.8	38.4	-	-	-	-	-	-	-
8257/1 BLUE/CE	120.6	60.0	21.4	13.7	38.3	37.9	-	-	-	-	-	-	-

* Fixing holes drill to accept 4mm countersunk screws.

Max panel thickness 1.6mm.

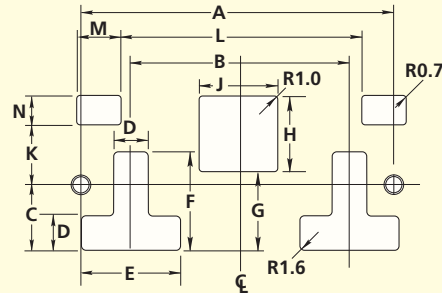


CAPITAL 45A DP 'SLIMLINE' COOKER CONTROL UNIT INTERIORS

List No	*A	B	C	D	E	F	G	H	J	K	L	M	N
4522/1	120.6	24.9	42.7	14.0	38.6	17.1	14.2	29.5	19.2	12.6	7.1	31.75	21.1
4522/13	120.6	24.9	42.7	14.0	38.6	17.1	14.2	29.5	19.2	12.6	7.1	31.75	21.1
List No	P	R	S	T	V	W							
4522/13	4.5	9.5	31.75	36.77	6.48	0.62							

* Fixing holes drill to accept 3.5mm countersunk screws.

Max panel thickness 1.6mm.

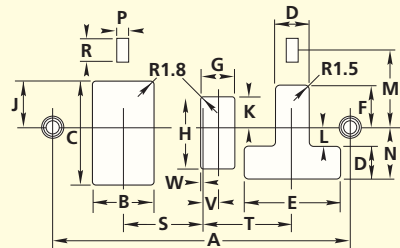


CAPITAL 13A FUSED CONNECTION UNIT INTERIORS

List No	*A	B	C	D	E	F	G	H	J	K
4831/1	60.3	22.0	38.0	-	-	-	-	-	-	-
4832/1	60.3	48.0	38.0	-	-	-	-	-	-	-
4832/13	60.3	48.0	38.0	-	-	-	23.4	16.8	16.6	10.5
4836/1	60.3	22.0	38.0	29.0	17.0	14.0	-	-	-	-
4837/1	60.3	48.0	38.0	29.0	17.0	14.0	-	-	-	-
4837/13	60.3	48.0	38.0	29.0	17.0	14.0	23.4	16.8	16.6	10.5

* Fixing holes drill to accept 4mm countersunk screws.

Max panel thickness 1.6mm.




CAPITAL CO-AXIAL OUTLETS

List No	*A	B	List No	*A	B	C	D
8265/1	60.3	15.0 Dia	8266/1 (Old)	60.3	41.0	30.0	3.0
8267/1	60.3	15.0 Dia	8268/1 (New)	60.3	42.5	33.0	2.0

* Fixing holes drill to accept 3.5mm countersunk screws.

Max panel thickness 1.7mm.

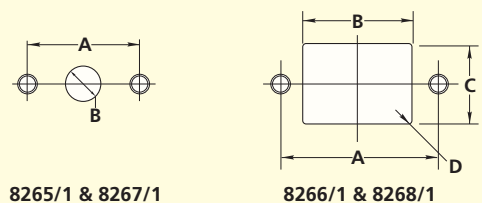

All dimensions in mm. General tolerance $\pm 0.13\text{mm}$. These dimensions are a guideline only, more detailed drawings are available upon request.