



TL Mini Standard Colours

TL Mini 8W/33-640 1FM/10X25CC

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data


General Information	
Cap base	G5 [G5]
Life to 10% failures (nom.)	5000 h
Life to 50% failures (nom.)	10000 h
Life to 50% failures preheat (nom.)	10000 h
System description	na [-]
Light Technical	
Colour code	33-640
Luminous flux (nom.)	410 lm
Colour designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	58 %
Lumen maintenance 2,000 hours (nom.)	80 %
Lumen maintenance 5,000 hours (nom.)	70 %
Correlated colour temperature (nom.)	4100 K
Luminous efficacy (rated) (nom.)	51 lm/W
Color rendering index (nom.)	60
Operating and Electrical	
Power (Rated) (Nom)	7.1 W
Lamp current (nom.)	0.145 A
Voltage (Nom)	56 V

Controls and Dimming	
Dimmable	yes
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	4.4 mg
Energy Consumption kWh/1000 h	8 kWh
Product Data	
Full product code	871150070473327
Order product name	TL Mini 8W/33-640 FAM/10X25BOX
EAN/UPC – product	8711500704733
Order code	70473327
Local Code	833
Numerator – quantity per pack	1
Numerator – packs per outer box	250
Material no. (12NC)	928001003318
Net weight (piece)	27.000 g
ILCOS Code	FD-8/41/2B-E-G5

TL Mini Standard Colours

Warnings and Safety


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL Mini 8W/33-640 FAM/10X25BOX	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm

TL Mini 8W/33-640

Photometric data

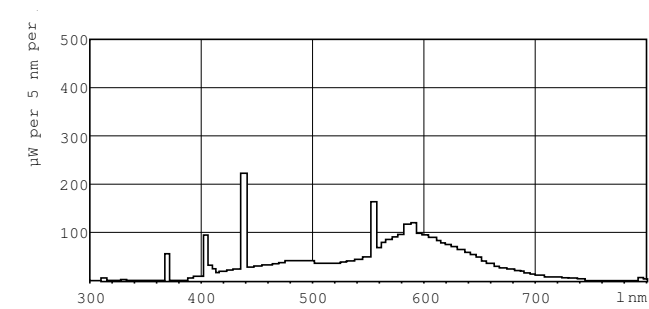

Lightcolour /33-640

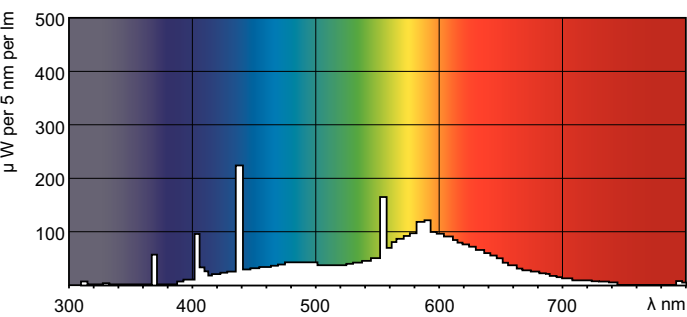

Lightcolour /33-640

