


COPPER TUBE LUGS 4-ESI FIXING



A-4ESI

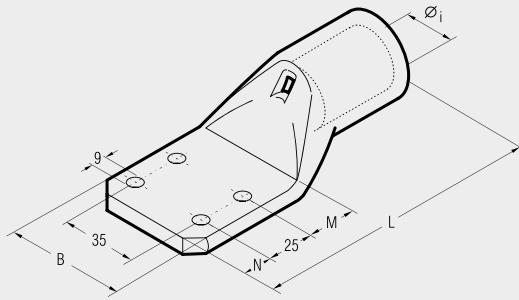


A-4ESI series lugs are made from high purity electrolytic Copper tube, annealed and Tin plated.

The four hole stud fixing in accordance with E.A. specifications ensures compatibility with most transformer fixing arrangements.

Details of the appropriate crimping tools and dies are shown on pages 178 to 179.

INSULATED COVERS

For uninsulated connectors

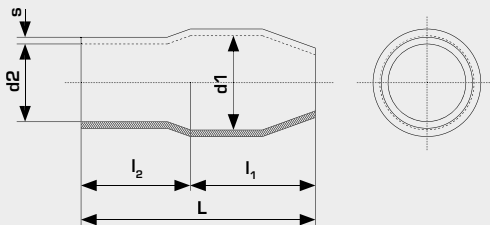

ES

Ref.	Connectors A-M*	d1 Ø	d2 Ø	L ₁ ±1	L ₂ ±1	L ± 2	s ± 0.2	Quantity	Minimum Order Qty
ES03..	A03	3.3	3.1	7.0	8.0	15.0	0.6	100	3.000
ES06..	A06	4.5	3.7	8.0	8.0	16.0	0.7	100	
ES1..	A1	5.7	4.1	9.0	9.0	18.0	0.8	100	
ES2..	A2	7.2	6.2	11.0	10.0	21.0	1.0	100	1.000
ES3..	A3	10.0	8.0	15.0	13.0	28.0	1.1	100	
ES5..	A5	12.0	9.5	15.0	14.0	29.0	1.2	100	
ES10..	A7, A9, A10	14.0	11.8	17.0	17.0	34.0	1.4	100	500
ES14..	A12, A14	17.0	13.9	22.0	20.0	42.0	1.5	100	
ES19..	A17, A19	19.0	16.0	25.0	21.0	46.0	1.5	50	
ES24..	A20, A24	22.0	18.0	31.0	24.0	55.0	1.7	50	200
ES30..	A29, A30	24.0	20.0	32.0	28.0	60.0	1.8	50	
ES37..	A35, A37	26.0	22.0	34.0	31.0	65.0	1.8	50	
ES40..	A40, A48**	32.2	24.0	38.0	31.0	69.0	2.0	50	100
ES48..	A48**	36.5	27.2	42.0	33.0	75.0	2.0	50	
ES80..	A60, A80	36.7	30.0	42.0	33.0	75.0	2.0	25	

Dimensions are in mm

Add the suffix corresponding to the selected colour to the reference:

-BU blue, -GY grey, -BR brown, -BK black, -RE red, -YE yellow,

* See A-M type copper tube lugs on pages 22-23, 32

** Depending on the diameter of the insulated cable

Insulated covers in PVC for general use with Cembre A-M copper tube lugs characterised by environmental tolerance, flexibility, not inflammability & stable performance. Widely used for the insulation and protection of connections and electrical terminations.

General features:

- Material: PVC
- Self extinguishing (UL94): VO
- Working temperature: 85 °C
- Colours: red, yellow, blue, black, grey, brown.