


Plugs

- screwless


- with screw terminals

3

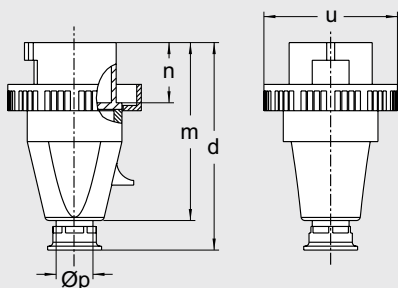


Amp.	63			125		
Poles	3	4	5	3	4	5
d	243	243	243	315	315	315
m	195	195	195	258	258	258
n	67	67	67	75,5	75,5	75,5
u	110	110	110	130	130	130
Øp	18-35	18-35	18-35	24-45	24-45	24-45

Plugs, screw terminal connection,
with trumpet gland,
IP 67

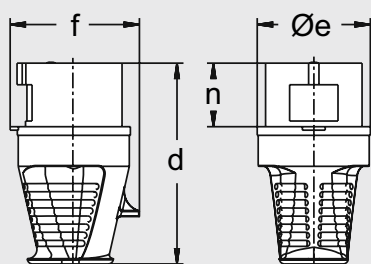


Amp.	16		32		63	
Poles	4	5	4	5	4	5
d	65	65	155	72	240	81
Øe	58	65	72	72	81	81
f	68	75	79	88	97	97
n	37	37	46	46	67	67

Phase sequence control plugs,
IP 44

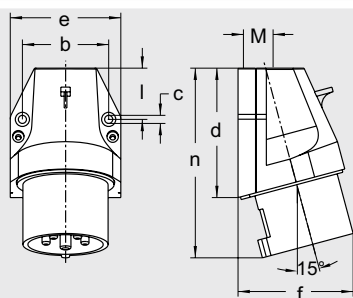


Amp.	16			32		
Poles	3	4	5	3	4	5
b	45,5	60	60	60	60	60
c	5,3	5,3	5,3	5,3	5,3	5,3
d	74	80	80	97	97	97
e	60	74	74	82	82	82
f	60	73	73	80	80	86
l	28	31	31	45	45	45
n	110	117	117	141	141	141
M	20	20	20	25	25	25

Wall mount appliance inlets,
external fixing,
1 top cable entry,
IP 44

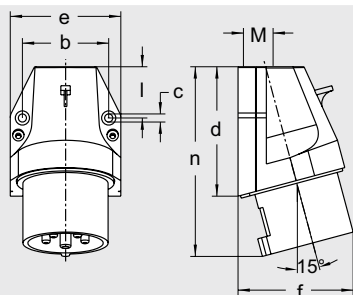

Amp.	16			32		
Poles	3	4	5	3	4	5
b	45,5	60	60	60	60	60
c	5,3	5,3	5,3	5,3	5,3	5,3
d	74	80	80	97	97	97
e	60	74	74	82	82	82
f	60	73	73	80	80	86
l	28	31	31	45	45	45
n	110	117	117	141	141	141
M	20	20	20	25	25	25

Wall mount appliance inlets,
external fixing,
1 top cable entry,
IP 44

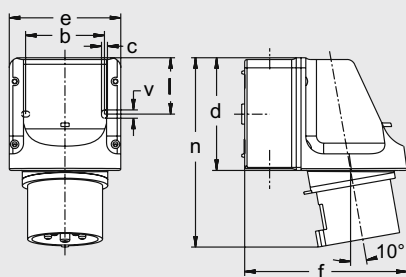

Amp.	16		32	
Poles	4	5	4	5
b	66,5	66,5	66,5	66,5
c	5	5	5	5
d	96	96	96	96
e	95	95	95	95
f	140	140	140	140
l	47,5	47,5	47,5	47,5
n	151	151	160	160
v	7	7	7	7
M	20/25	20/25	20/25	20/25

Wall mount appliance inlets,
internal fixing,
2 knock-out cable entries on top and bottom,
1 knock-out entry in the back wall,
IP 44

Ampère	Poles	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			> 50 - 500 V 100 - 300 Hz			> 50 - 500 V over 300 - 500 Hz			
		3pole 4h	4pole 4h	5pole 4h	3pole 6h	4pole 9h	5pole 9h	3pole 9h	4pole 6h	5pole 6h	3pole 7h	4pole 7h	5pole 7h	3pole 10h	4pole 10h	5pole 10h	3pole 2h	4pole 2h	5pole 2h	



		Part numbers																							
63	3	269 304	269 306	269 309	269 407	269 410	269 402	5																	
63	4	269 404	269 409	269 406																					
63	5	269 504	269 509	269																					
63	5			269 Ni																					
125	3	279 304	279 306	279 309	279 407	279 410	279 402	2																	
125	4	279 404	279 409	279 406																					
125	4	279 404	279 409	279 406																					
125	5			279 Ni																					
for voltage ranges of 110 V - 690 V																									
16	4								10																
16	5																10								
32	4																								10
32	5																								
63	4								10																
63	5																5								
16	3																	610 304	610 306	610 309	610 407	610 410	610 402	10	
16	4	610 404	610 409	610 406	10																				
16	5	610 504	610 509	610		10/60																			
16	3			610 Ni			10																		
32	3	630 304	630 306	630 309				630 407	630 410	630 402	10														
32	4	630 404	630 409	630 406	10																				
32	5	630 504	630 509	630		10																			
32	5	630 504	630 509	630 Ni			10																		
16	5			610 PH							10														
16	5			610 PH Ni	10																				
16	5			611 PH Ni		10																			
32	5			630 PH			10																		
32	5	630 PH Ni	10																						
32	5	631 PH Ni		10																					
16	4	616 404			616 409	616 406	616 407	616 410	616 402	5															
16	5	616 504	616 509		616	5																			
32	3	636 304	636 306	636 309	636 407						636 410	636 402	5												
32	4	636 404	636 409	636 406										5											
32	5	636 504	636 509	636			5																		

Availability of blue printed (or not listed) frequencies and voltages up to 690 V on request!