

HORIZON SQUARE PLAIN

LED


CFL



White
HS3/W



Titanium
HS3/X



Size	HS3
A	330mm
B	111mm

LED / Lamp Types

- 28W & 38W 4-Pin, 3500K, GR10 Cap.
- 16W 2D 4-Pin, 3500K, GR8 Cap.
- LED options
 - White (standard).
 - Warm white (opal).

Materials


- Body: 330mm vandal resistant polycarbonate selfextinguishing fire properties in black / white / titanium.
- Diffuser: Vandal resistant polycarbonate in opal with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions & photocell.
- Screw down lid.
- Photocell external use only.

Standards

- IP65.
- IK10.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

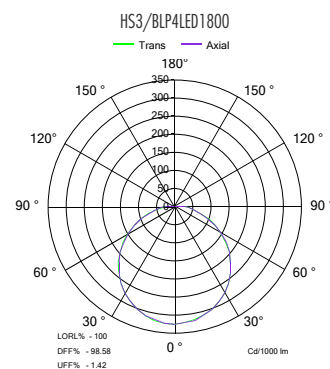

Options

LED	Horizon Square Plain Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy	Emergency	Photocell
LED 1800	HS3/BLP4LED1800	Black	Premium Opal	IP65	80	4000K	16.8W	1340lm	79.7lm/W	✓	✓

CFL	Horizon Square Plain Code	Colour Finish	Diffuser	IP Rating	Emergency	Photocell
16W HF	HS3/BLP516U6	Black	Premium Opal	IP65	✓	✓
28W HF	HS3/BLP528U6	Black	Premium Opal	IP65	✓	✓
38W HF	HS3/BLP538U6	Black	Premium Opal	IP65		✓

Code Options (Add suffix to code)



3 Hour Maintained
Emergency
M



Photocell
C



Anti Tamper Screws
T