


The KingShield range of LED Ultra Slim fittings are supplied complete with a Cool White (4,000K) or Warm White (3000k) LED lamp, 2 metre power/link lead, prismatic diffuser and mounting brackets (clips). Up to 30 of the same wattage fittings can be interlinked by butt/and/or lead connections.

- Fittings can be interlinked by butt and/or lead connection
- Individually switched
- Flicker free quick start
- Cool White (4,000K)



TECHNICAL DATA SHEET

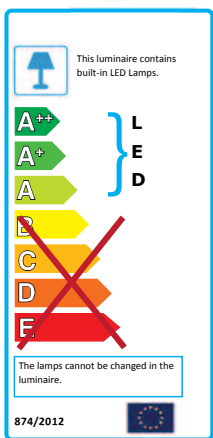

	SLLLED3	SLLLED4	SLLLED7	SLLLED14	SLLLED18	SLLLED22	
Please add WW to code for Warm White option							
Product Finish	White	White	White	White	White	White	
Product Dimensions	268 X 22 X 44mm	343 x 22 x 44mm	571 x 22 x 44mm	904 x 22 x 44mm	1204 x 22 x 44mm	1504 x 22 x 44mm	
Product weight	210g	240g	280g	360g	430g	520g	
Barcode	5012739640087	5012739640094	5012739640100	5012739640117	5012739640124	5012739640131	
Lumens (lumens/watt)	86.9 lm/W	84.6 lm/W	85.9 lm/W	84.4 lm/W	84.8 lm/W	85.6 lm/W	
Lamp Type	LED	LED	LED	LED	LED	LED	
Beam Angle	120°	120°	120°	120°	120°	120°	
Lamp life expectancy	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	
LED's Array	18	24	40	62	84	102	
Colour Temperature	4,000K (Cool White)						
Voltage	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	
Max Wattage	3W	4W	7W	14W	18W	22W	
Operating Temp	-20 to +40						
Main housing material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
Fixings	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	
Guarantee	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	
Certification & Conformity	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006

GREEN BROOK
ELECTRICAL

Tel +44 (0) 1279 772 772
Fax +44 (0) 1279 422 007
www.greenbrook.co.uk



ULTRA SLIM LED LINK LIGHT FITTINGS


AQUILA RANGE

The KingShield range of LED Ultra Slim fittings are supplied complete with a Warm White (3,000K) LED lamp, 2 metre power/link lead, prismatic diffuser and mounting brackets (clips). Up to 30 of the same wattage fittings can be interlinked by butt/and/or lead connections.

- Fittings can be interlinked by butt and/or lead connection
- Individually switched
- Flicker free quick start
- Warm White (3,000K)



TECHNICAL DATA SHEET

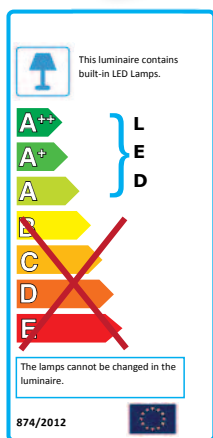

	SLLED3WW	SLLED4WW	SLLED7WW	SLLED14WW	SLLED18WW	SLLED22WW	
Product Finish	White	White	White	White	White	White	
Product Dimensions	268 X 22 X 44mm	343 x 22 x 44mm	571 x 22 x 44mm	904 x 22 x 44mm	1204 x 22 x 44mm	1504 x 22 x 44mm	
Product weight	210g	240g	280g	360g	430g	520g	
Barcode	5012739640148	5012739640155	5012739640162	5012739640179	5012739640186	5012739640193	
Lumens (lumens/watt)	82.7 lm/W	82.9 lm/W	82.6 lm/W	82.1 lm/W	81.4 lm/W	82.7 lm/W	
Lamp Type	LED	LED	LED	LED	LED	LED	
Beam Angle	120°	120°	120°	120°	120°	120°	
Lamp life expectancy	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs	
LED's Array	18	24	40	62	84	102	
Colour Temperature	3,000K (Warm White)						
Voltage	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	
Max Wattage	3W	4W	7W	14W	18W	22W	
Operating Temp	-20 to +40						
Main housing material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
Fixings	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	Mounting brackets	
Guarantee	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	
Certification & Conformity	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006	EN60598-1:2008+A11:09, EN 60598-2-1:1989, EN 61347-1:2008+A1:11, EN 61347-2-13:2006

GREEN BROOK
ELECTRICAL

Tel +44 (0) 1279 772 772
Fax +44 (0) 1279 422 007
www.greenbrook.co.uk

