


TERMOSTRIP TSS series, flame-retardant Polyolefin shrinkage ratio 2÷1

Main Features

Heat-shrinkable Polyolefin tubing strip for general use; is environmentally neutral, flexible, non-flammable and offers fast heat shrinkage and stable performance.

Main uses include insulation and protection of electrical conductors, connectors and terminations; protection of metal tubes from corrosion; protection of antennae and various identification applications.

- Colours: Black, Red, White, Blue, Transparent, Yellow, Green, Grey, Brown, Yellow/Green.
- Packaging: Strips in Box

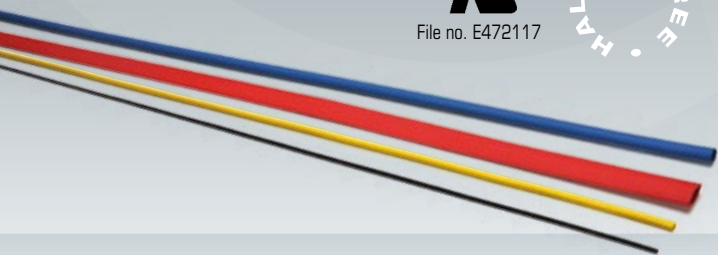

Ref.	Colour		Internal Ø before shrinking	Internal Ø after shrinking	Strip Length	Qty Strips per box
TSS24BK	BLACK	●	2.4 mm	1.2 mm	1.22 m	30
TSS32BK	BLACK	●	3.2 mm	1.6 mm	1.22 m	30
TSS48BK	BLACK	●	4.8 mm	2.4 mm	1.22 m	30
TSS64BK	BLACK	●	6.4 mm	3.2 mm	1.22 m	30
TSS95BK	BLACK	●	9.5 mm	4.8 mm	1.22 m	20
TSS127BK	BLACK	●	12.7 mm	6.4 mm	1.22 m	15
TSS190BK	BLACK	●	19.0 mm	9.5 mm	1.22 m	10
TSS254BK	BLACK	●	25.4 mm	12.7 mm	1.22 m	6
TSS380BK	BLACK	●	38.0 mm	19.0 mm	1.22 m	4
TSS510BK	BLACK	●	51.0 mm	25.4 mm	1.22 m	2
TSS24RE	RED	●	2.4 mm	1.2 mm	1.22 m	30
TSS32RE	RED	●	3.2 mm	1.6 mm	1.22 m	30
TSS48RE	RED	●	4.8 mm	2.4 mm	1.22 m	30
TSS64RE	RED	●	6.4 mm	3.2 mm	1.22 m	30
TSS95RE	RED	●	9.5 mm	4.8 mm	1.22 m	20
TSS127RE	RED	●	12.7 mm	6.4 mm	1.22 m	15
TSS190RE	RED	●	19.0 mm	9.5 mm	1.22 m	10
TSS254RE	RED	●	25.4 mm	12.7 mm	1.22 m	6
TSS380RE	RED	●	38.0 mm	19.0 mm	1.22 m	4
TSS510RE	RED	●	51.0 mm	25.4 mm	1.22 m	2
TSS24WH	WHITE	○	2.4 mm	1.2 mm	1.22 m	30
TSS32WH	WHITE	○	3.2 mm	1.6 mm	1.22 m	30
TSS48WH	WHITE	○	4.8 mm	2.4 mm	1.22 m	30
TSS64WH	WHITE	○	6.4 mm	3.2 mm	1.22 m	30
TSS95WH	WHITE	○	9.5 mm	4.8 mm	1.22 m	20
TSS127WH	WHITE	○	12.7 mm	6.4 mm	1.22 m	15
TSS190WH	WHITE	○	19.0 mm	9.5 mm	1.22 m	10
TSS254WH	WHITE	○	25.4 mm	12.7 mm	1.22 m	6
TSS380WH	WHITE	○	38.0 mm	19.0 mm	1.22 m	4
TSS510WH	WHITE	○	51.0 mm	25.4 mm	1.22 m	2
TSS24BU	BLUE	●	2.4 mm	1.2 mm	1.22 m	30
TSS32BU	BLUE	●	3.2 mm	1.6 mm	1.22 m	30
TSS48BU	BLUE	●	4.8 mm	2.4 mm	1.22 m	30
TSS64BU	BLUE	●	6.4 mm	3.2 mm	1.22 m	30
TSS95BU	BLUE	●	9.5 mm	4.8 mm	1.22 m	20
TSS127BU	BLUE	●	12.7 mm	6.4 mm	1.22 m	15
TSS190BU	BLUE	●	19.0 mm	9.5 mm	1.22 m	10
TSS254BU	BLUE	●	25.4 mm	12.7 mm	1.22 m	6
TSS380BU	BLUE	●	38.0 mm	19.0 mm	1.22 m	4
TSS510BU	BLUE	●	51.0 mm	25.4 mm	1.22 m	2
TSS24TR	TRANSPARENT	○	2.4 mm	1.2 mm	1.22 m	30
TSS32TR	TRANSPARENT	○	3.2 mm	1.6 mm	1.22 m	30
TSS48TR	TRANSPARENT	○	4.8 mm	2.4 mm	1.22 m	30
TSS64TR	TRANSPARENT	○	6.4 mm	3.2 mm	1.22 m	30
TSS95TR	TRANSPARENT	○	9.5 mm	4.8 mm	1.22 m	20
TSS127TR	TRANSPARENT	○	12.7 mm	6.4 mm	1.22 m	15
TSS190TR	TRANSPARENT	○	19.0 mm	9.5 mm	1.22 m	10
TSS254TR	TRANSPARENT	○	25.4 mm	12.7 mm	1.22 m	6
TSS380TR	TRANSPARENT	○	38.0 mm	19.0 mm	1.22 m	4
TSS510TR	TRANSPARENT	○	51.0 mm	25.4 mm	1.22 m	2