


Floor Standing Enclosures

Steel Range

Accessories | Baying & lifting


Separation plate gasket, SPDG

Description:	To obtain IP 43 TYPE 1 sealing in combination with the separation plate SPD/SPDS.
Material:	Neoprene 5x15/20.
Pack quantity:	6 m.
Item no.	
SPDG01	

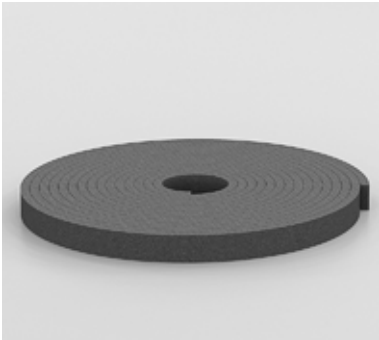


Lifting eye bolts, LE

Description:	Mounts directly to the frame corner pieces of the enclosure for when lifting operations are required. Complies with DIN 580 lifting requirements. M12 thread.
Maximum load:	3400N per lifting eye with max angle of 45°. Please follow nVent HOFFMAN lifting instructions.
Pack quantity:	4 pieces.
Material	
Item no.	
Zinc plated	LE9304
Stainless steel 304	LE9304SS
Stainless steel 316L	LE9316SS

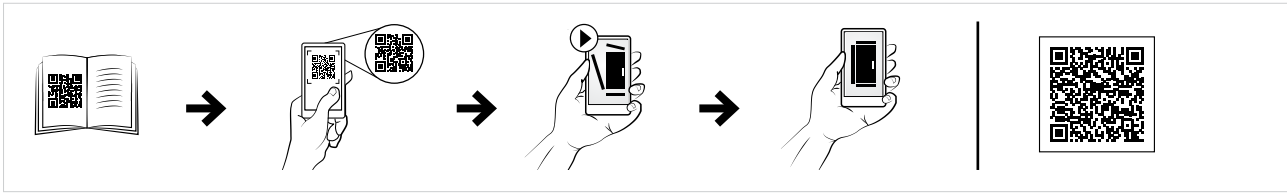

Lifting devices, LC

Description:	For optimal weight distribution when lifting bayed enclosures. To be used in combination with baying bracket.
Pack quantity:	2 pieces with mounting accessories.
Material	
Item no.	
Zinc plated	LC02
Stainless steel 316L	LC02-316

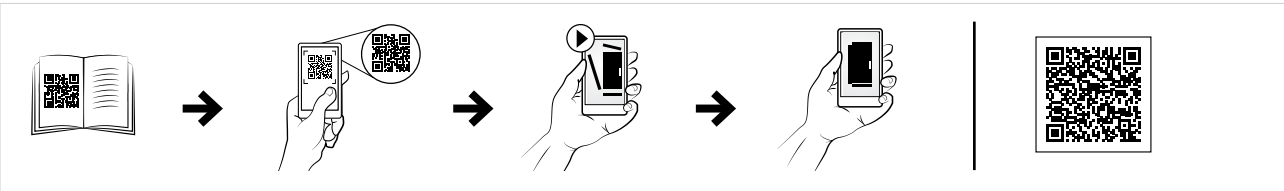

Lifting kit, MCUK

Description:	For lifting the enclosure together with the top cable frame MCU of 200 mm high. Mounted directly into the enclosure's frame and therefore releasing the MCU from any strain. 300 mm high MCUs must be lifted separately.
Pack quantity:	4 spindles with lifting eyes according to DIN 580 lifting instructions.
Item no.	
MCUK04	

