




LUXOMAT® PD9-1C-12-48V-FC



Size comparison




Detector



Power supply


■ TECHNICAL DATA

	12 - 48 V AC/DC
	360°
	Ø 10 m across Ø 6 m towards Ø 4 m seated
	IP20 / Class II
	-25°C to +50°C
	Housing UV- and shock resistant polycarbonate
	Channel 1 (control the lighting potential free)
	1000 W, cos φ = 1
	30 s - 30 min or pulse
	10 - 2000 Lux

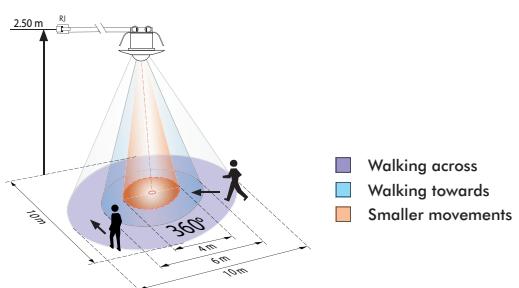

i PRODUCT INFORMATION

- Mini-motion detector with operating voltage 12-48 V
- One switching channel for operating the light
- Easy installation on unit
- Power unit passes through hole in ceiling for sensor
- Spring clips for quick and easy installation in suspended ceilings and light fittings
- Includes 45mm cover ring and blinds

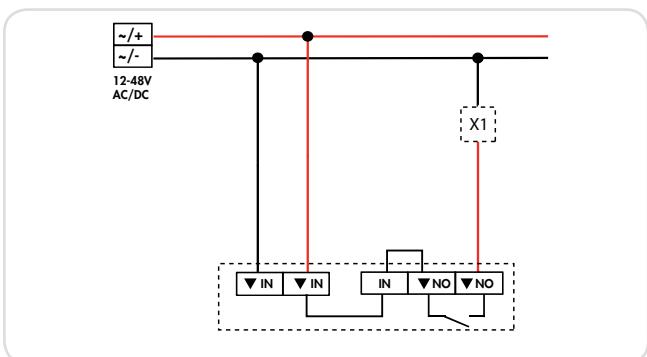

Description	Colour	Part number
PD9-1C-12-48V-FC	white	92985
Accessory (optional)		
Cover ring for PD9 (Ø 36 mm)	white/ silver/ anthracite	92238/ 92237/ 92235
Cover ring for PD9 (Ø 45 mm)	white/ silver	92327/ 92346