



Product Data Sheet

KSR1308WW

Issue-A 10012017MAR

Description

Mini Carpio LED Recessed Wall Light c/w Warm White LEDs



General

Colour Options	White Only
Light Source	Non Replaceable LED Module
LED Expected Life	25,000 Hours Expected LED Life
Product Warranty	2 Years from Date of Purchase
Mounting Method	Recessed into Stud or Solid Walls

Electrical Parameters

Supply Voltage	220-240V AC
Frequency	50-60Hz
Circuit Wattage	2W Including Losses
Circuit Current	0.045 Amps
Driver mA Rating	150mA
PFC	0.65
In Rush Current	0.1 Amps

Classifications and Approvals

Earth Class	Class II, No Earth Required
IP Rating	IP54
Fire Rating (Part B)	N/A
Sound Insulating (Part E)	N/A
Air & Moisture Rated (Part C)	N/A
Efficiency Rated (Part L)	<5W Exempt from Part L1
Energy Rating	A+
CE Marked	Yes
Designed In Accordance to	BSEN60598

Installation

Cut-out	Solid Wall – 75mmØ or Stud Wall – 72mmØ
Minimum Void	60mm Depth Required
Insulation	N/A
Working Ambient Temp.	-10°C to +30°C
Primary Connections	Pre Wired with 300mm 2 Core Flex
Secondary Connections	N/A
Accessories	N/A



Product Data Sheet

KSR1308WW


Issue-A 10012017MAR

Performance

Luminous Flux	16 Lumens
Luminous Efficacy (L/pw)	8 L/pw
CCT	3000k Warm White
CRI (Ra)	CRI Ra:80
Beam Angle	45°
Dimmable	No, Non Dimmable
Tilt/Rotate	No, Fixed Position

Construction

Main Chassis	Polycarbonate
Trim/Bezel	Aluminium
Diffuser	Clear Polycarbonate
Lens	N/A
Heat Sink	N/A
Finish Type	Textured Powder Coat Painted
Luminaire Weight	TBC

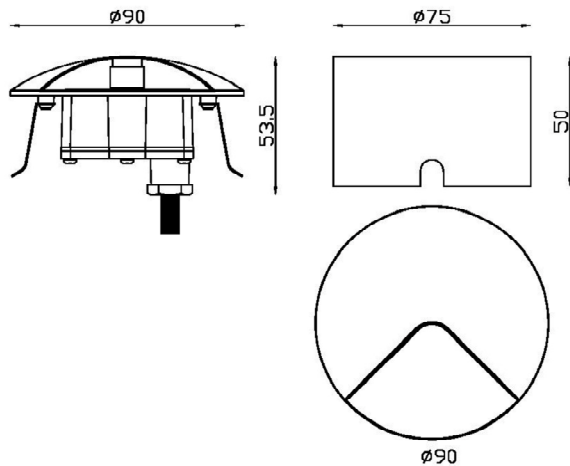

ØCut out



75mm

Solid Wall Cut Out

ØCut out



72mm

Stud Wall Cut Out