




Cablecraft - CTT Crimping Solutions


B Pre-Insulated Crimp Terminals - Insulated Tabs and Receptacles

INSULATED PUSH-ON MALE

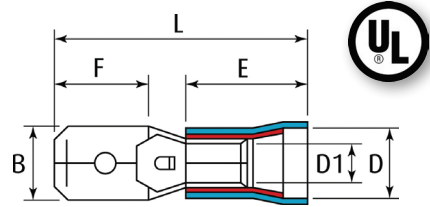

WIRE Ø mm ²	PART NO.	FOR TAB		DIMENSIONS (mm)						PACK QTY
		WIDTH (mm)	THICK (mm)	B	F	L	E	D	D1	
0.5 - 1.5 RED	CIPOM1	6.35	0.8	6.4	7.8	21.2	10.0	4.3	1.7	100
1.5 - 2.5 BLUE	CIPOM2	6.35	0.8	6.4	7.8	21.2	10.0	5.0	2.3	100
4 - 6 YELLOW	CIPOM3	6.35	0.8	6.4	7.8	23.7	12.5	6.5	3.4	50

FULLY INSULATED PUSH-ON FEMALE

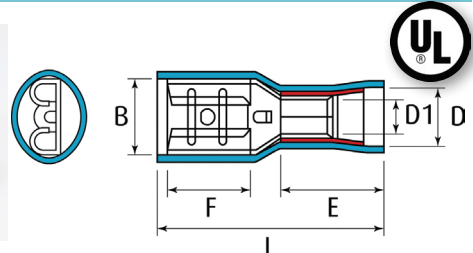

WIRE Ø mm ²	PART NO.	FOR TAB		DIMENSIONS (mm)						PACK QTY
		WIDTH (mm)	THICK (mm)	B	F	L	E	D	D1	
0.5 - 1.5 RED	CIFPO1-2.8F	2.8	0.5	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-2.8FX	2.8	0.8	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-4.8F	4.8	0.5	5.0	6.5	19.0	10.0	4.3	1.7	100
	CIFPO1-4.8FX	4.8	0.8	5.0	6.5	19.0	10.0	4.3	1.7	100
	CIFPO1-6.3F	6.4	0.8	6.6	7.9	21.0	10.0	4.3	1.7	50
1.5 - 2.5 BLUE	CIFPO2-2.8F	2.8	0.5	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-2.8FX	2.8	0.8	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-4.8F	4.8	0.5	5.0	6.5	19.0	10.0	5.0	2.3	100
	CIFPO2-4.8FX	4.8	0.8	5.0	6.5	19.0	10.0	5.0	2.3	100
	CIFPO2-6.3F	6.4	0.8	6.6	7.9	21.0	10.0	5.0	2.3	50
4 - 6 YELLOW	CIFPO3-6.3F	6.4	0.8	6.6	7.9	25.0	13.0	6.5	3.4	50
	CIFPO3-9.5F	9.5	1.2	9.9	12.5	28.5	13.0	6.5	3.4	25