



HD Long palm copper tube fixing terminals



HD Long palm fixing lugs with stud size and centres shown as standard. Other sizes and centres can be manufactured if required.

SPECIFICATIONS


Material

Seamless copper tube to BS EN 12449: 1999.

Approvals

BS EN 61238-1-2003 and BS 4579 bright electro tin plating to BS 1872: 1974. RSE/RTD 024 Part 7 Issue A. LUL. RoHS 2 compliant

3.3 Kv

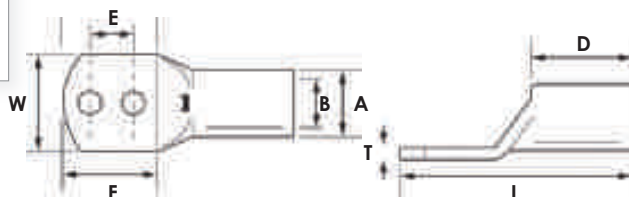

HD long palm copper tube fixing terminals

Cable size (mm ²)	Part number	Stud size (mm)	Dimensions (mm)								Pack qty
			A	B	W	E	F	D	L	T	
10	CCTLP2H10	6	6.9	4.4	11.0	16.0	34.0	10.0	50.0	2.0	1
16	CCTLP2H16	6	8.0	5.6	11.0	16.0	34.0	11.0	52.0	2.2	1
25	CCTLP2H25	6	9.5	7.0	13.5	16.0	34.0	13.0	57.0	2.4	1
35	CCTLP2H35	6	11.0	8.2	15.5	16.0	34.0	18.0	56.0	2.8	1
50	CCTLP2H50	6	12.0	9.5	17.0	16.0	34.0	18.0	61.0	2.4	1
70	CCTLP2H70	12.5	15.0	11.5	21.2	45.0	75.0	18.0	105.0	2.0	1
95	CCTLP2H95	12.5	17.0	13.5	24.3	45.0	75.0	24.0	111.0	3.5	1
120	CCTLP2H120	12.5	19.0	15.0	27.2	45.0	75.0	27.0	115.0	4.0	1
150	CCTLP2H150	12.5	21.0	16.5	30.0	45.0	75.0	27.0	120.0	4.5	1
185	CCTLP2H185	12.5	23.0	18.5	33.5	45.0	75.0	30.0	125.0	4.5	1
240	CCTLP2H240	12.5	26.0	21.0	37.7	45.0	75.0	32.0	128.0	5.0	1
300	CCTLP2H300	12.5	28.0	23.0	41.0	45.0	75.0	37.0	137.0	5.0	1
400	CCTLP2H400	12.5	32.0	27.0	47.3	45.0	75.0	38.0	138.0	5.0	1
500	CCTLP2H500	12.5	38.0	30.0	55.0	45.0	75.0	50.0	160.0	8.2	1
630	CCTLP2H630	12.5	44.0	33.8	63.0	45.0	75.0	50.0	164.0	10.2	1
800	CCTLP2H800	12.5	49.0	38.0	70.0	45.0	75.0	56.0	171.0	11.0	1



HD Long palm fixing terminals - Blanks



HD Blank long palm fixing lugs enable the user with specific requirements to customise the stud sizes and positions.

SPECIFICATIONS


Material

Seamless copper tube to BS EN 12449: 1999.

Approvals

BS EN 61238-1-2003 and BS 4579 bright electro tin plating to BS 1872: 1974. RSE/RTD 024 Part 7 Issue A. LUL. RoHS 2 compliant

3.3 Kv

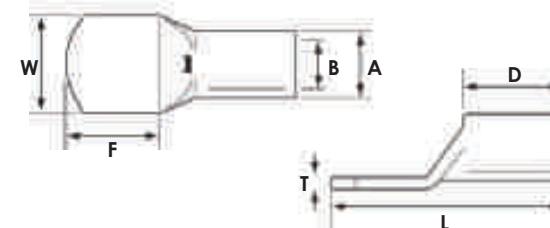

HD long palm fixing blanks

Cable size (mm ²)	Part number	Dimensions (mm)							Pack quantity
		A	B	W	F	D	L	T	
10	CCTLPBL10	6.9	4.4	11.0	34.0	10.0	50.0	2.0	1
16	CCTLPBL16	8.0	5.6	11.0	34.0	11.0	52.0	2.2	1
25	CCTLPBL25	9.5	7.0	13.5	34.0	13.0	57.0	2.4	1
35	CCTLPBL35	11.0	8.2	15.5	34.0	18.0	56.0	2.8	1
50	CCTLPBL50	12.0	9.5	17.0	34.0	18.0	61.0	2.4	1
70	CCTLPBL70	15.0	11.5	21.2	75.0	18.0	105.0	2.0	1
95	CCTLPBL95	17.0	13.5	24.3	75.0	24.0	111.0	3.5	1
120	CCTLPBL120	19.0	15.0	27.2	75.0	27.0	115.0	4.0	1
150	CCTLPBL150	21.0	16.5	30.0	75.0	27.0	120.0	4.5	1
185	CCTLPBL185	23.0	18.5	33.5	75.0	30.0	125.0	4.5	1
240	CCTLPBL240	26.0	21.0	37.7	75.0	32.0	128.0	5.0	1
300	CCTLPBL300	28.0	23.0	41.0	75.0	37.0	137.0	5.0	1
400	CCTLPBL400	32.0	27.0	47.3	75.0	38.0	138.0	5.0	1
500	CCTLPBL500	38.0	30.0	55.0	75.0	50.0	160.0	8.2	1
630	CCTLPBL630	44.0	33.8	63.0	75.0	50.0	164.0	10.2	1
800	CCTLPBL800	49.0	38.0	70.0	75.0	56.0	171.0	11.0	1