



Transformer terminals - 4 hole fixing

Transformer terminals have a standard hole size of 8mm. The 4 hole stud fixing in accordance with E.A specifications, ensures compatibility with most transformer fixing arrangements. Our special application service can manufacture custom hole configurations to your specification. Please contact us for details.

SPECIFICATIONS

Material Seamless copper tube to BS EN 12449:1999


Approvals BS EN 61238-1 2003 and BS 4579 bright, electro-tin plating to BS 1872:1974. RoHS 2 compliant

Bell mouth entry

TF70 to TF400 are of the brazed palm type with barrel dimensions identical to the HD heavy duty terminals.

Transformer terminals

Cable size (mm ²)	Part no.	Stud size	Dimensions (mm)		Pack qty
			B	D	
70	TF70	8.0	35.0	25.0	1
95	TF95	8.0	35.0	25.0	1
120	TF120	8.0	35.0	25.0	1
150	TF150	8.0	35.0	25.0	1
185	TF185	8.0	35.0	25.0	1
240	TF240	8.0	35.0	25.0	1
300	TF300	8.0	35.0	25.0	1
400	TF400	8.0	35.0	25.0	1

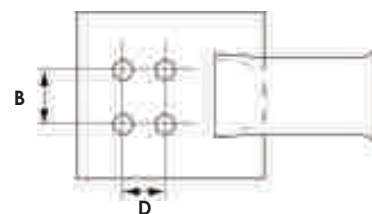


Chamfered entry

TF500 to TF1000 are dimensionally identical to the HD Heavy Duty terminals with the exception of the palm fixing holes.

Transformer terminals

Cable size (mm ²)	Part no.	Stud size	Dimensions (mm)		Pack qty
			B	D	
500	TF500	8.0	35.0	25.0	1
630	TF630	8.0	35.0	25.0	1
800	TF800	8.0	35.0	25.0	1
1000	TF1000	8.0	35.0	25.0	1

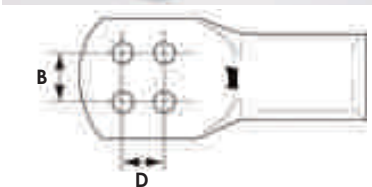


Copper round pin terminals

Copper round pin terminals cater for conductor sizes from 10mm² to 400mm². The reduced pin makes these terminals ideal for terminating conductors into contact blocks. Our standard stock sizes are listed below. Larger sizes up to 1000mm² can be custom made to order. Please contact us for details.

SPECIFICATIONS

Material Electrolytic copper, electro-tin plated

Approvals RoHS 2 compliant

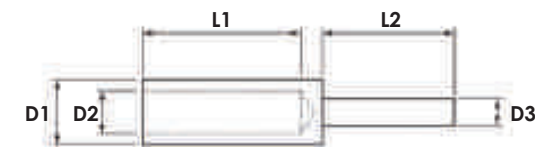

Copper round pin terminals

Cable size (mm ²)	Part number	Dimensions (mm)					Pack quantity
		L1	L2	D1	D2	D3	
10	CCTRP10	8	10	6.25	4.8	3.8	1
16	CCTRP16	11	13.5	7	5.35	3.7	1
25	CCTRP25	11	19	9	7	5.0	1
35	CCTRP35	11	19	10.7	8	5.0	1
50	CCTRP50	16	19.5	12.3	9.7	7.5	1
70	CCTRP70	19	18	15.8	11.5	8	1
95	CCTRP95	19.5	18	17	13.5	8	1
120	CCTRP120	24	24	19	15	10	1
150	CCTRP150	27	24	22	16.5	10	1
185	CCTRP185	30	25	25	18.5	12	1
240	CCTRP240	32	25	25	21	14	1
300	CCTRP300	42	32	28	23	16	1
400	CCTRP400	45	32	32	27	16	1

Other sizes/dimensions can be manufactured, please contact technical@cablecraft.co.uk for more information.