


UNINSULATED SHEET TERMINALS

Cablecraft's range contains sizes for cables from 10mm² - 95mm² and stud sizes from 4mm to 16.0mm. They maintain strength during the crimping cycle, and are electro tin plated for maximum corrosion resistance and conductivity.

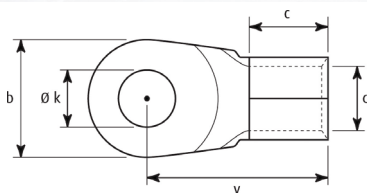

SPECIFICATIONS

MATERIAL:
Electrolytic Copper, Electro-Tin Plated

MAX. ELEC. RATING - 600V - 75°C:

10mm² - 19 AMP

16mm² - 88 AMP

25mm² - 115 AMP

35mm² - 160 AMP

50mm² - 215 AMP

70mm² - 235 AMP

95mm² - 255 AMP

APPROVALS: UL Approved E211389.



DIMENSIONS (mm)

CABLE SIZE (mm ²)	PART NO.	STUD SIZE D2 (mm)	d	y	b	c	ØK	PACK QTY
10	CST10-4	4	4.5	16.0	10.0	8.0	4.3	50
	CST10-5	5	4.5	16.0	10.0	8.0	5.3	50
	CST10-6	6	4.5	17.0	11.0	8.0	6.5	50
	CST10-8	8	4.5	20.0	14.0	8.0	8.4	50
	CST10-10	10	4.5	21.0	18.0	8.0	10.5	50
	CST10-12	12	4.5	23.0	22.0	8.0	13.0	50
16	CST16-5	5	5.8	20.0	11.0	10.0	5.3	50
	CST16-6	6	5.8	20.0	11.0	10.0	6.5	50
	CST16-8	8	5.8	22.0	14.0	10.0	8.4	50
	CST16-10	10	5.8	24.0	18.0	10.0	10.5	50
	CST16-12	12	5.8	26.0	22.0	10.0	13.0	50
25	CST25-5	5	7.5	25.0	12.0	11.0	5.3	50
	CST25-6	6	7.5	25.0	12.0	11.0	6.5	50
	CST25-8	8	7.5	25.0	16.0	11.0	8.4	50
	CST25-10	10	7.5	26.0	18.0	11.0	10.5	50
	CST25-12	12	7.5	31.0	22.0	11.0	13.0	50
	CST25-14	14	7.5	31.0	22.0	11.0	15.0	50
	CST25-16	16	7.5	35.0	28.0	11.0	17.0	50