

E1W Premier Range Brass Cable Gland Pack




Application: Brass indoor and outdoor gland suitable for all types of steel wire armoured cable (SWA), providing an environmental seal on both the cable inner and outer sheaths. The gland also provides mechanical cable retention and electrical continuity via armour wire termination.

Operating Temperature (standard seals): -20°C to +80°C

Ingress Protection: IP66 EN60529

Approval: BS EN 62444 : 2013

Gland only available on request.

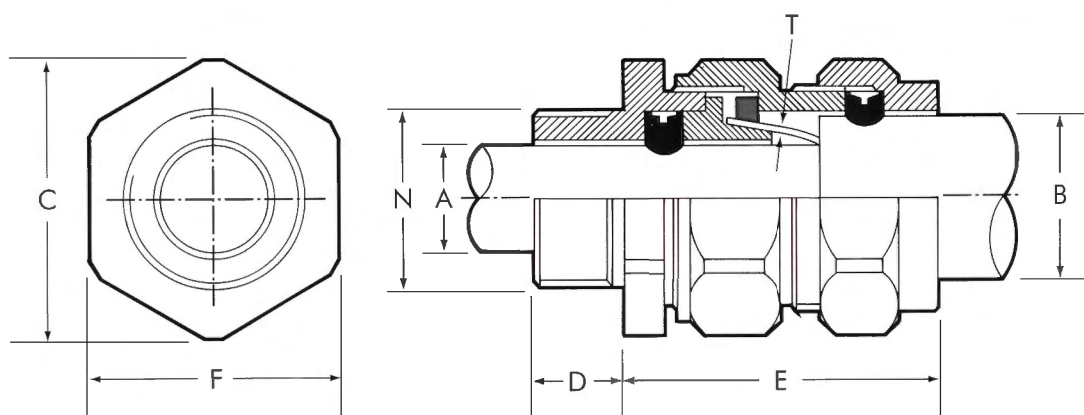

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details		Assembled Length
		Diameter N	Length D	Diameter A min max	Diameter B min max	Armour wire size T	A/F F	A/C C	
E1W20/16 PACK	2	20	15	3.5 - 9.0	8.4 - 13.8	0.90	22.0	24.4	40.0
E1W20S PACK	2	20	15	8.0 - 11.8	12.9 - 15.8	0.90/1.25	24.0	26.6	42.0
E1W20 PACK	2	20	15	11.0 - 13.8	15.5 - 20.0	0.90/1.25	30.0	33.3	43.0
E1W25 PACK	2	25	15	13.0 - 19.8	20.3 - 27.5	1.25/1.60	38.0	42.2	46.0
E1W32 PACK	2	32	15	19.0 - 26.4	26.7 - 33.5	1.60/2.00	46.0	51.0	50.0
E1W40 PACK	1	40	20	25.0 - 32.4	33.0 - 40.9	1.60/2.00	55.0	61.0	54.5
E1W50S PACK	1	50	20	31.5 - 38.0	39.4 - 46.3	2.00/2.50	60.0	66.6	57.5
E1W50 PACK	1	50	20	36.5 - 44.0	45.7 - 52.6	2.00/2.50	65.0	72.1	57.5
E1W63S PACK	1	63	20	42.5 - 49.0	52.1 - 61.5	2.50	75.0	83.2	63.0
E1W63 PACK	1	63	20	48.5 - 55.5	58.4 - 65.3	2.50	80.0	88.8	63.0
E1W75S PACK	1	75	20	54.5 - 62.0	64.8 - 73.0	2.50	90.0	100.0	68.0
E1W75 PACK	1	75	20	60.5 - 67.0	71.0 - 78.0	2.50	95.0	105.4	68.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud or

Low Smoke Zero-halogen LSZH shroud -

Suffix above part numbers with either -LSF or -LSZH



See page 44 for more information on EarthingNuts™