

wall mounting socket outlet, switched, interlocked - housing dimensions 260x160



Product description	
BALS-Prd.-Nr	16238
EAN	4024941162388
Product group	GT wall mounting socket outlet, switched, interlocked
Current	63A
Number of poles	5p
Arrangement of the phases	3P+N+PE
Earth 'clock' position	6 h
Voltage	200/346 up to 240/415V


Product description	
Frequency	50 and 60Hz
Protection degree	IP67
Colour code	red
Colour of appliance	Hinged lid red, Bayonet ring grey, Housing screws grey, Housing bottom grey, Housing top grey, Control knob grey
Connection design	screw terminal as box terminal with Kontex-contact
Maximum conductor size	25,0 qmm
Cable entry	top entry 1x M32 bottom entry 2x M32
Dimension of enclosure	260x160 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	2.25 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941162388
Length	325 mm
Width	217 mm
Height	210 mm
Weight	2.466 kg

Logistics data

Volume

13,588.4 ccm

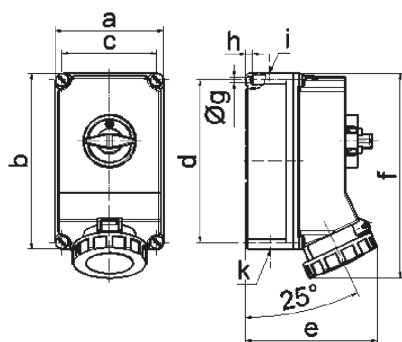

12 MB 10

Ampere	63	63	63			
Polzahl	3	4	5			
a	160,0	160,0	160,0			
b	260,0	260,0	260,0			
c	140,0	140,0	140,0			
d	240,0	240,0	240,0			
e	195,0	195,0	195,0			
f	304,0	304,0	304,0			
g ø	8,1	8,1	8,1			
h	10,0	10,0	10,0			
i	M40	M40	M40			
k	M32/40	M32/40	M32/40			