


flex7 Sensor Link & Switch Drop Leads

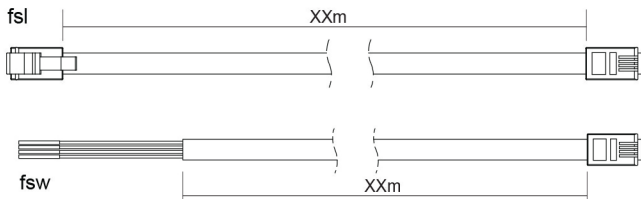

Lengths

Comes in lengths up to 50 metres, refer to price list.

Rating

Connector:	4P4C modular jack, RJ11 style 4 way 28 a.w.g. (7×0.12mm) Cu
Test Standard:	EN50289, UL 1581, UI758
Insulation Material:	Solid Polyethylene
Insulation diameter:	0.95(+/-0.1 0) mm×4
Jacket External:	2.45(+/-0.15)mm×4.95(+/-0.20)
Jacket Material:	FR-PVC(complies RoHS)

Max. Conductor DC Resistance at 20°C (Ω /100M) **16.73**

Min. Insulation DC Resistance at 20°C (M Ω) **200**

Rated Temperature: 80°C

Rated Voltage: 500V