

**GLS BULB WITH DUSK TO DAWN DUAL SENSOR B22 806LM 8W 2700K
NON-DIMM 240 BEAM FROSTED INTEGRAL**

ILGLSB22SC042



This 8W retro-fit Integral LED Auto Sensor Classic Globe (GLS) (large bayonet base) delivers a warm light equivalent to 60W. Because security lighting is on an average of 12 hrs. per day you can save over 30 GBP/44 EUR per bulb, per year on energy. It automatically switches ON at dusk and OFF at dawn, with dual 360 sensors to detect daylight from all angles. Ideal for external porches, walkways, paths and patios. To be used in suitable enclosed outdoor fittings.

Details

Quick Order Code:	371725
Barcode:	5055788218234
Category:	Lamps
Range Name:	Auto Sensor
Product Type:	GLS
Market Segment:	Commercial outdoor (with appropriate outdoor fitting), Residential outdoor (with appropriate outdoor fitting)
Features:	Dusk-to-Dawn
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	113
Product Width (mm):	60
Product Weight (g):	47
Material:	Aluminium, Polycarbonate
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Plastic and Aluminium heat sink, polycarbonate diffuser
Globe Finish:	Frosted
Globe Type:	GLS
Bulb Fixing:	Pendant, Wall
Bulb or Luminaire Shape:	Round
Placement / Application:	Outdoor (with appropriate outdoor fitting), General Lighting

Electrical Data



Power (W):	8
Power Consumption (W) :	8
Power Factor:	0.5
Wattage equivalent (W):	60
Amperage (mA):	55
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	101
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	240
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

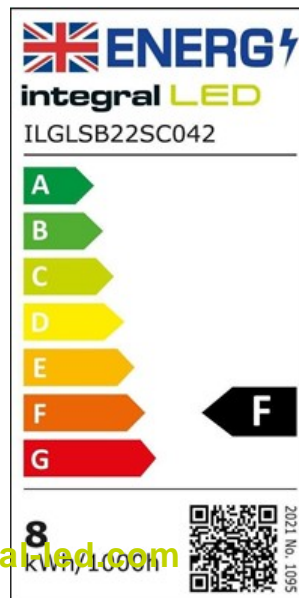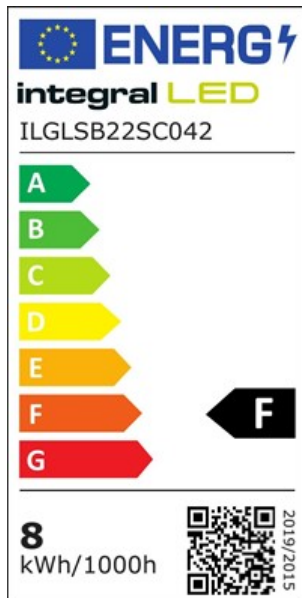

Portal.integralled.com

Packaging

Package Weight (g):	47
Package Length (mm):	113
Package Width (mm):	60
Package Depth (mm):	60
Qty per euro pallet:	1200