

**MR11 GU10 BULB 330LM 3.2W 4000K DIMMABLE 36 BEAM 80 CRI
INTEGRAL**

ILMR11DE012



This MR11 GU10 lamp provides the light output of a 40W halogen lamp for only 3.2W. This spotlight offers excellent dimming performance when installed with compatible dimmer switches, giving precise control of your environment. Ideal for residential or commercial interiors.

Details

Quick Order Code:	996768
Barcode:	5055788237150
Category:	Lamps
Range Name:	240V GU10 Base
Product Type:	MR11 GU10
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	48
Product Width (mm):	35
Product Weight (g):	35
Material:	Plastic
Base Term:	GU10
Bulb Base:	GU10
Construction:	Plastic heat-sink, Injection moulded diffuser
Bulb Fixing:	Downlight
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	3.2
Power Consumption (W) :	3.2
Power Factor:	0.4
Wattage equivalent (W):	40
Amperage (mA):	22



Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	40
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	300
Luminous efficacy (lm/W):	103
Peak Intensity (Cd):	600
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	36
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500
Useful Lumens (lm):	300

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

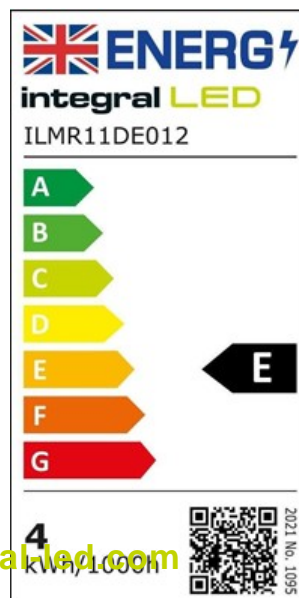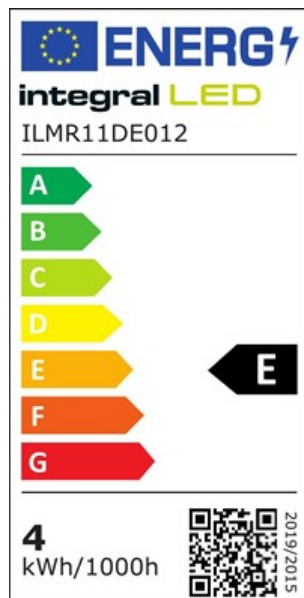

Portal.integralled.com

Packaging

Package Weight (g):	43
Package Length (mm):	40
Package Width (mm):	40
Package Depth (mm):	60