



Legend set included (LGDSET)



White bulkhead frame available



Download
IES File from
website



LED MAINTAINED / NON MAINTAINED EMERGENCY BULKHEAD

Low energy alternative to standard fluorescent emergency bulkheads.

- Polycarbonate construction
- Hinged gear tray & push fit terminal block: allows for quicker and easier installation and maintenance
- Internal or external use • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- High output LEDs with bright white light
- Semi recessed fixing: allows a more discreet installation option
- Dedicated self adhesive legend pack included with a combination of symbols: allows multiple exit path designation options
- Additional legend set available: **LGDSET**. Can be used as an additional legend set or as individual stickers for walls and doors
- Viewing distance 22m




EMLED3M:

- Facility for remote switching and non-maintained mode
- 235 lm when connected to mains, 150 lm when connected to battery

BULKHEAD FRAME (BULKFRAME)

- For use with emergency bulkheads T5EM3NM/M & EMLEDNM/M
- Pressed steel construction
- Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm

- **Fitting / Frame** = M.O.M: 1 / O.P.Q: 12
- **Legend** = M.O.M: 12 / O.P.Q: 12

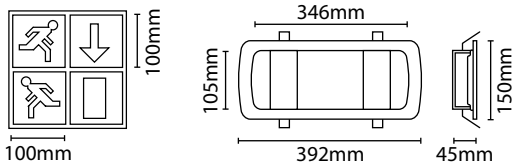

Hinged gear tray

Code	Version	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating
EMLED3M	Maintained	White	7W	6000K	235/150 lm	30,000 hrs	IP65
EMLED3NM	Non Maintained		2W		150 lm		