Metering facilities for incoming and outgoing circuits

Powerpact 4 panelboards

The arrangement consists of side extension boxes that house the meters and also provide additional cabling space. Meters and current transformers are ordered separately to meet the needs of the installation. The necessary cable looms are included with the steelwork. The meters are mounted on hinged doors. The box also contains the auxiliary busbar that provides the 240V control supply for the meters. The left hand extensions have sufficient meter positions for half the number of outgoing ways. The right hand extensions have positions for half the number of outgoing ways plus three additional positions. These extra positions may be used for additional metering or mounting surge arresters, control fuses etc. The lower two positions have a transparent window and DIN rail. This can be removed if not required.

Note: the meters, CT modules and surge arresters must be ordered separately

Incoming and outgoing metering for boards up to 630A


(This arrangement is not applicable for boards fitted with MGPINC direct connections).

When both incoming and outgoing metering is required there is a very cost effective solution by incorporating the incoming metering into the right hand side extension box. Components required are:

- Standard extension box MG6CEX to provide the required cable spreading space
- Current transformer module to fit on line side of incoming breaker.
- PM750MG meter.
- Two MGPC2025 corner units, optional

The meter should be cabled to the CT module according to the diagram supplied. (loom not supplied). The auxiliary supply to the meter should be taken from one phase and neutral and must be suitably fused.

Note. A warning notice should be placed in the board as the voltage connections are taken off the live side of the main breaker.

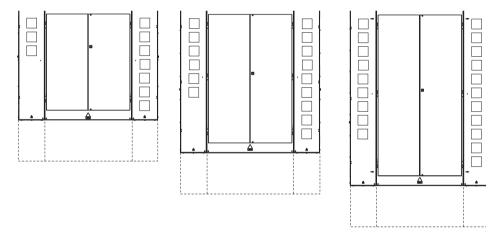

MG2C* 250A b	oard		
Incoming metering kit	250A		MG6CEXM
MG6Cxx 630A	board		
Incoming metering kit	400A		MG64M
	630A		MG66M
MG8Cxx 800A	board		
Incoming metering kit	800A		MG88M
	MG88MX - less met	er	
630A & 800A outgoing metering side extension boxes			
6 way board	Left hand side (*)	3 meter positions	MGPCM6L
	Right hand side (*)	7 meter positions	MGPCM6R
12 way board	Left hand side (*)	6 meter positions	MGPCM12L
	Right hand side (*)	9 meter positions	MGPCM12R
18 way board	Left hand side (*)	9 meter positions	MGPCM18L
	Right hand side (*)	11 meter positions	MGPCM18R
(1)			

(*) When the board is inverted for top entry main cables these side extensions fit on the other side of the board.

Accessories	
Cable loom	MGPCML
Meter blanks	O8908