

Vertical Fold Flat Mask 222 - FFP2 - VALVED

PRODUCT CODE: BEB120-101-000

HANDY SIZED & EASILY POCKETED HYGIENIC FOLD FLAT DISPOSABLE MASK

TECHNICAL SPECIFICATION

RESPIRATORY PROTECTION

INSTRUCTIONS FOR USE

Mask must be fitted in accordance with the instructions supplied

Care must be taken to ensure that the correct mask type is selected for the work to be carried out

If in doubt as to the type of mask required seek professional guidance


PERFORMANCE

Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fibres, fumes and mists

DIMENSIONS OF OUTER PACKAGING

Quantity: 100 (10 inner packs of 10 masks)

Weight: 3.1kg (Approx)

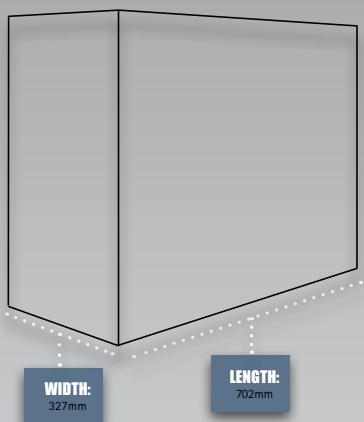

DIMENSIONS OF MASK

Depth: 110mm

Width: 108mm

Height: 140mm

Weight: 14g (Approx)

CLEANING & MAINTENANCE

Not Applicable - Disposable Product

Store the masks out of sunlight away from chemicals in a dry atmosphere



MAN MADE FIBRES:

The mask has an ergonomic 3D design to fit most face shapes

VALVE:

Polystyrene exhalation valve with rubber diaphragm

LIMITATIONS OF USE

Protection will only be offered if the mask is fitted correctly

The mask, when in contact with the skin may cause allergic reactions to susceptible individuals

Do not use where exposure to chemical gases may be experienced

Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres

Ensure good seal around the face is created before entering the hazard area

The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminant in the atmosphere. The mask should be changed immediately if,

- Breathing difficulties due to clogging are experienced,
- Breakthrough of a contaminant is detected by smell, taste or any other means, or
- The mask becomes damaged

CONFORMITY & MARKINGS

Meets the FFP2 requirements of EN149

CE Certificate Number 682743, issued by BSI Product Certification

EN149:2001 + A1:2009

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jsp-safety.com



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 30/03/2020 - 4