

Flexible Reinforcements

L I M I T E D

Bancroft Rd Burnley
Lancs BB10 2TP
England

tel: 44 (0) 1282 478222
fax: 44 (0) 1282 478210
email: sales@flexr.co.uk
web: www.flexr.co.uk



Orange Fabric 1525mm Polyester Orange

Usable width	153 (cms)	Weight	75 (g/sqm)
Description	Polyester Woody Taffeta		
Weave			
Composition	100 % Polyester		
Applicable Shade Range			
Minimum weaving / knitting quantity			
Minimum dyeing quantity			
Leadtime			

WARP	55 Dtex	Ends 43
WEFT	167 Dtex textured	Picks 27
Washable / Dry-clean only		

PHYSICAL PROPERTIES


Tensile strength	Warp 400N up	Weft 900N up	ISO 13934-1
Tear strength	Warp 7N up	Weft 9N up	ISO 9290
Seam Slippage - original (before laundry)	Warp 5,5 kg up	Weft 5,5 kg up	M&S P12 Method I (at SO 2,5 mm)
Washing stability 40°C	+1% / -2%		ISO 6330 (+Mean Shrinkage)
Thermal stability 160°C	+1% / -2%		M&S P10
Steam stability	+1% / -2%		ISO 3005

COLOUR FASTNESS

Light	Class 3 up	ISO 105 B02 (Xenon Arc-Lamp)
Washing	Colour change 4 grade up Staining 3 grade up	ISO 105 C06
Dry cleaning	Colour change 4 grade up Staining 3-4 grade up	ISO 105 D01
Perspiration	Colour change 4 grade up Staining 3 grade up	ISO 105 E04
Rubbing	Staining 4 grade up (dry)	ISO 105 X12
Water at 37°C	Colour change 4 grade up Staining 3 grade up	ISO 105 E01

REMARK: Special colors (i.e. Black, Dark Blue, Burgundy, Brill Red) are 0,5-1 grade lower of colour fastness.

CARE INSTRUCTIONS:

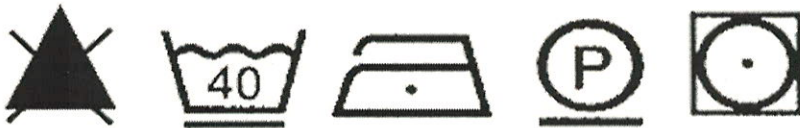

CONTACT SALES OR TECHNICAL DEPARTMENT IN CASE OF QUERIES

All above information shall only be used as a guide; buyers shall independently test and determine the products suitability.

The mentioned data are average of test results and should not be used for the purpose of lawsuit or warranty.

e-mail: sales@flexr.co.uk Telephone: 01282 478222 Fax: 01282 478210 Website: www.flexr.co.uk

QA70 CF35

Issue Date: 13/06/17

Issue No: 2