

OH_S_, OH_S3 Installation instruction






OH_S2: Type 1,3R, 12




Label should be affixed to the rear mounting surface immediately adjacent the handle after installation.



OH_S2AJ1

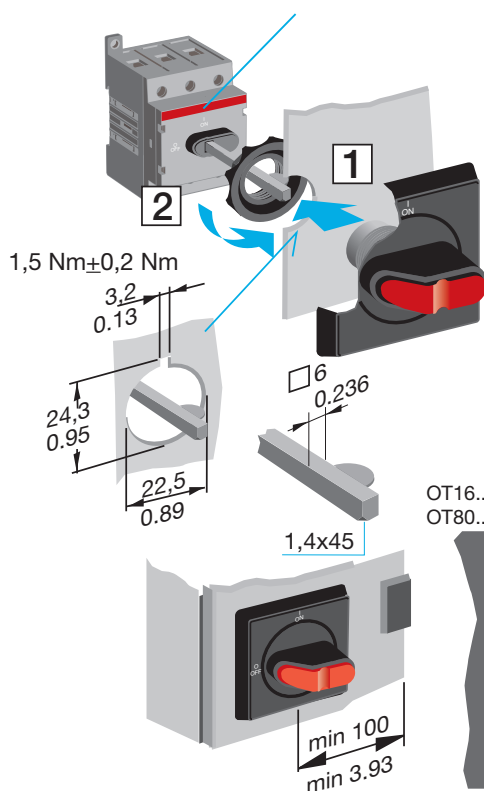

OT16...63F = 15 mm/ 0.59 in
OT80...125E = 20 mm/ 0.79 in

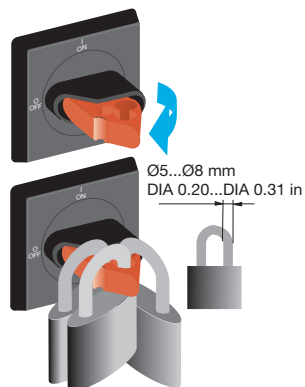




E63822

OH_S1: Type 1



Label should be affixed to the rear mounting surface immediately adjacent the handle after installation.

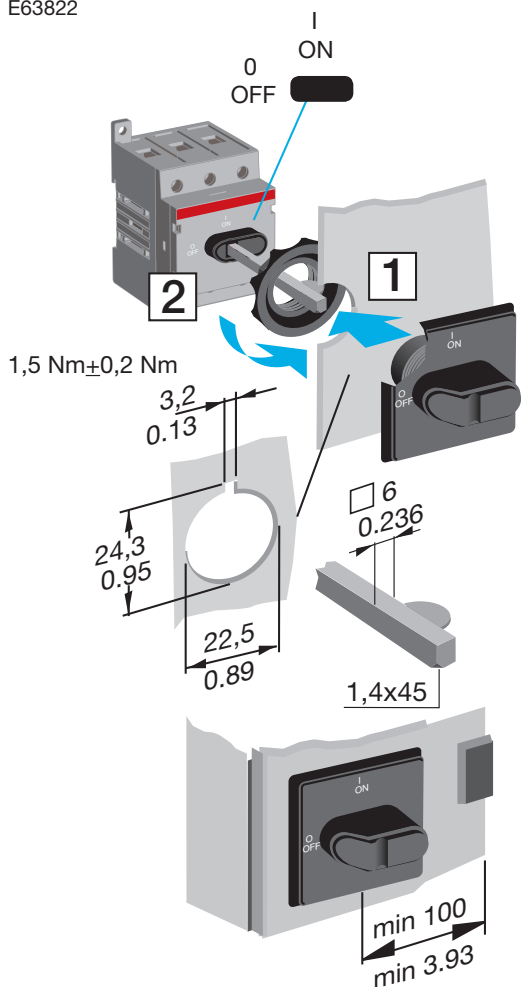



OH_S1AH1



OH_S3AH1



OT16...63F = 15 mm/ 0.59 in
OT80...125E = 20 mm/ 0.79 in



For more information please contact:

ABB Oy, Protection and Connection
P.O. Box 622, FI-65101 Vaasa, Finland
new.abb.com/low-voltage

Power and productivity
for a better world™

