


Order Code: PNL060-KIT01

Photometric Data	
Lumens	3150
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	105
Colour Temperature (K)	4000 - 4000
SDCM	<4
Beam Angle (°)	120 x 120
UGR	<19
Light Distribution	Symmetric
Photobiological Risk Group	0
Lens / Reflector	Diffuser lens/optic/panel

Life Data	
Rated Life @ 25°C (Hrs)	50.000
Rated Life L70/B50 @ 25°C	54000

Electrical Data	
LED Power	27 - 27
Input (W)	30
Input (V)±10%	220 - 240
Voltage Type	AC
Input Current (A)	0.13
Power Factor	0.95
THD (%)	<20
Inrush (A) (peak)	60
No. Per C16 Breaker	48
Electrical Class	II
Connector Type	Flying Lead With Plug
Short Circuit Protection	Yes
Thermal Overload Protection	Yes
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	800 - 800
ECA Compliant	Yes

Physical Data	
Ambient Rated Temperature Range (°C)	-10 - 40
Degree of Protection (IP)	IP44
Degree of Protection (IP) from Underside	IP65
Housing Colour	White
Housing Material	Aluminium
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	15
Weight (kg)	3.3
Warranty (year)	5
Case Material	Steel
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	60
Cutout Width for Recess Mount (mm)	600
Cut Out Length for Recess Mount (mm)	600
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic

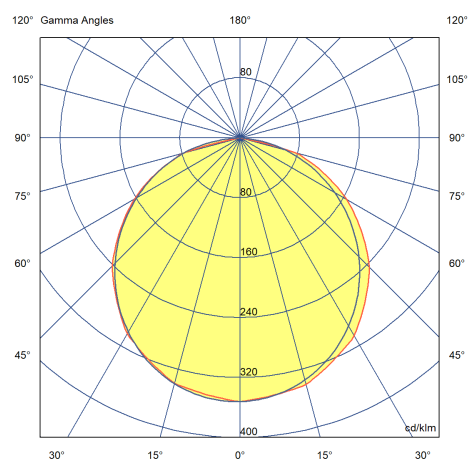

Order Code: PNL060-KIT01

Accessories

--

Logistical Data

Item Gross Weight (kg)	3.36
Packaging Length (cm)	64
Packaging Width (cm)	64
Packaging Height (cm)	4.5
Carton Quantity	6
Carton Length (cm)	66
Carton Width (cm)	66
Carton Height (cm)	25
Carton Gross Weight (kg)	17.9