

UNINSULATED PIN CONNECTORS A-P

A-P series pin connectors are designed to terminate conductors into contact blocks. They are manufactured from copper strip, rolled, brazed and tin plated.

The terminals are manufactured from electrolytic Copper Cu-ETP CWO04A according to UNI EN 13599 and are tin plated to a minimum thickness of 3m.



CERTIFICATES 




2011/65/EU

UNINSULATED PIN CONNECTORS **A-P**

Technical characteristics


Material (Body)	ETP Copper elettrolytically tinned
Dimensional form (Fixing)	Blade terminal
Min operating temperature range	-50 °C
Max operating temperature range	150 °C

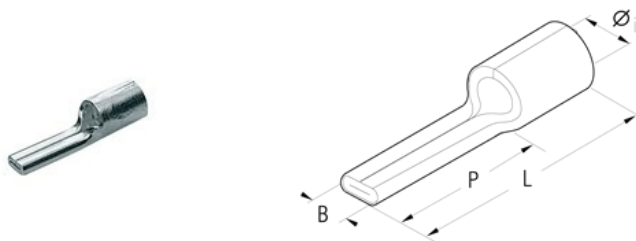

UNINSULATED PIN CONNECTORS A-P


List of products

A-P Cable type: copper, Maximum section: 10 mm²




Type	Ø	B	P	L	Pack qty	Min. pack qty
A2-P12	4.8 mm	4.3 mm	14.5 mm	23.5 mm	1,000	100

A-P Cable type: flexible copper, Maximum section: 10 mm²




Type	Ø	B	P	L	Pack qty	Min. pack qty
A2-P12	4.8 mm	4.3 mm	14.5 mm	23.5 mm	1,000	100

A-P Cable type: copper, Maximum section: 16 mm²




Type	Ø	B	P	L	Pack qty	Min. pack qty
A3-P14	5.9 mm	5.5 mm	18 mm	28 mm	1,000	100


A-P Cable type: flexible copper, Maximum section: 16 mm²




Type	Ø	B	P	L	Pack qty	Min. pack qty
A3-P14	5.9 mm	5.5 mm	18 mm	28 mm	1,000	100

A-P Cable type: flexible copper, Maximum section: 25 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A5-P16	7 mm	7 mm	20.3 mm	32 mm	500	100

A-P Cable type: copper, Maximum section: 25 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A5-P16	7 mm	7 mm	20.3 mm	32 mm	500	100

A-P Cable type: copper, Maximum section: 35 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A7-P20	8.9 mm	8 mm	24.5 mm	39 mm	500	100

A-P Cable type: flexible copper, Maximum section: 35 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A7-P20	8.9 mm	8 mm	24.5 mm	39 mm	500	100

A-P Cable type: copper, Maximum section: 50 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A10-P25	10 mm	9.5 mm	26 mm	45 mm	250	50

A-P Cable type: flexible copper, Maximum section: 50 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A10-P25	10 mm	9.5 mm	26 mm	45 mm	250	50

A-P Cable type: copper, Maximum section: 70 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A14-P30	11.5 mm	11 mm	31 mm	55 mm	200	50

A-P Cable type: flexible copper, Maximum section: 70 mm²


Type	Ø	B	P	L	Pack qty	Min. pack qty
A14-P30	11.5 mm	11 mm	31 mm	55 mm	200	50


A-P Cable type: flexible copper, Minimum section: 25 mm², Maximum section: 35 mm²


Type	Ø	B	P	L	Pack qty	Min. pack qty
A7-P20	8.9 mm	8 mm	24.5 mm	39 mm	500	100

A-P Cable type: flexible copper, Minimum section: 35 mm², Maximum section: 50 mm²


Type	Ø	B	P	L	Pack qty	Min. pack qty
A10-P25	10 mm	9.5 mm	26 mm	45 mm	250	50

A-P Cable type: flexible copper, Minimum section: 50 mm², Maximum section: 70 mm²



Type	Ø	B	P	L	Pack qty	Min. pack qty
A14-P30	11.5 mm	11 mm	31 mm	55 mm	200	50