


Cable fixings

Cable Cleats

TC Two Part Two Hole Fixing Cable Cleat

The TC range is manufactured in polypropylene, a plastic which has high electrical resistance, excellent tensile strength and stability at high and low temperatures. An ideal clamp where there is a highly corrosive atmosphere. Manufactured in black to minimise possibility of UV damage. The two part range for cables 50mm - 85mm diameter is intended to augment our range of single fixing cleats which accommodate cable from 5.0mm in overall diameter to 50.8mm in overall diameter.

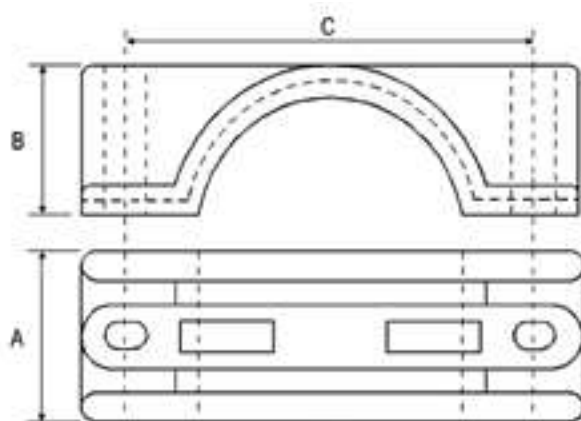

Features

- Manufactured in high strength polypropylene
- High impact resistance
- Unaffected by corrosive environments
- Higher mechanical strength than polyethylene
- High level of resistance to ultra-violet light
- Stable at -35°C to +105°C constant
- Supplied as a pair

Part No.	Cable Diameters in mm		Dimensions in mm			Clearance Bolt Holes
	Min	Max	W	C	L	
TC8	41.0	48.0	59.0	31.0	75.0	2 x 10mm
TC9	48.0	57.0	60.0	32.0	76.2	2 x 10mm
TC10	57.0	64.0	60.0	35.0	76.2	2 x 10mm
TC11	64.0	70.0	62.5	40.0	114.3	2 x 10mm
TC12	70.0	76.0	62.5	44.0	114.3	2 x 10mm
TC14	76.0	85.0	63.5	46.5	114.3	2 x 10mm

LSF: Low Smoke Halogen Free & Fire Retardent Cleats available on request. Larger sizes available (subject to M.O.Q).