

Cable glands & accessories

Tauras™ Cable Glands

TPCW Range – Tauras™ PEX® CW Outdoor Brass Cable Gland Pack



Application: Brass indoor and outdoor gland suitable for all types of steel wire armoured cable (SWA), providing an environmental seal on the outer cable sheath. The gland also provides mechanical cable retention and electrical continuity via armour wire termination.


Operating temp: -20°C to +80°C

Ingress protection: IP66

Approval: BS EN 62444:2013



Complete with award-winning EarthingNut™
INNOVATIVE POWER
PRODUCT OF THE YEAR

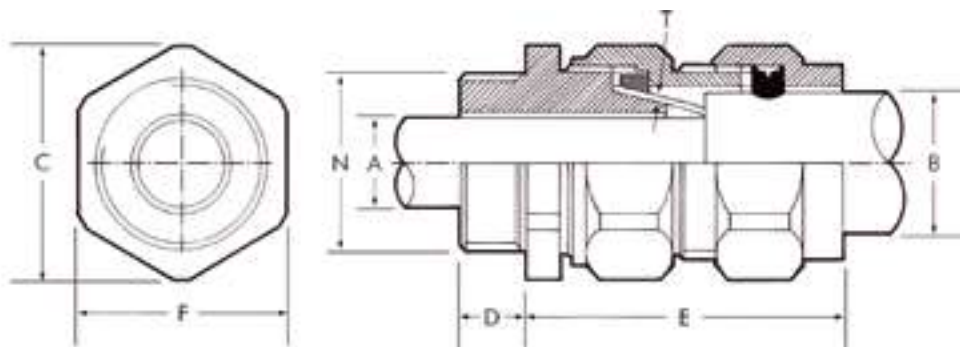

		Entry Thread		Cable Acceptance Details			Hexagonal Details				Assembled Length
Part No.	Pack Quantity	Diameter N	Length D	Diameter A min max	Diameter B min max	Armour wire size T	Body & Back Nut		Compression Nut		E
							A/F F	A/C C	A/F J	A/C K	
TPCW20S* PACK-EN	2	20	10	8.0 - 11.8	12.9 - 15.8	0.90/1.25	23.0	25.6	24.0	26.7	38.0
TPCW20* PACK-EN	2	20	10	11.0 - 13.8	15.5 - 20.5	0.90/1.25	26.0	28.9	28.0	31.1	39.0
TPCW25* PACK-EN	2	25	10	13.0 - 20.0	20.3 - 27.0	1.25/1.60	34.0	37.7	35.5	39.5	45.0
TPCW32* PACK-EN	2	32	10	19.0 - 26.4	26.7 - 33.5	1.60/2.00	42.0	46.8	46.0	51.2	48.0
TPCW40* PACK-EN	1	40	15	25.0 - 32.4	33.0 - 40.1	1.60/2.00	50.0	55.7	55.0	61.0	53.0
TPCW50S* PACK-EN	1	50	15	34.0 - 38.0	39.8 - 46.3	2.00/2.50	62.0	69.1	65.0	72.4	59.0
TPCW50* PACK-EN	1	50	15	37.0 - 44.2	46.0 - 52.6	2.00/2.50	62.0	69.1	65.0	72.1	59.0
TPCW63S* PACK-EN	1	63	15	43.0 - 49.0	52.3 - 61.5	2.50	76.0	84.7	80.0	89.2	66.0
TPCW63* PACK-EN	1	63	15	48.0 - 56.2	58.4 - 65.3	2.50	76.0	84.7	80.0	88.8	66.0
TPCW75S* PACK-EN	1	75	20	57.0 - 62.0	64.8 - 73.0	2.50	85.0	94.5	90.0	100.0	68.0
TPCW75* PACK-EN	1	75	20	60.0 - 67.0	71.0 - 78.0	2.50	90.0	100.0	95.0	105.0	68.0

All dimensions are in mm.

Pack content: Gland(s), shroud(s), EarthingNut™(s) and crimp terminations.
Packs are also available with Low-smoke LSF shroud.

*Add LSF to the Part No. for Low Smoke & Fume version,
i.e. **TPCW20SLSF PACK-EN**

To see a video showing a demonstration, scan this QR code

