


Swifts® medium duty (Topaz) cable ladder

lengths and fittings

100

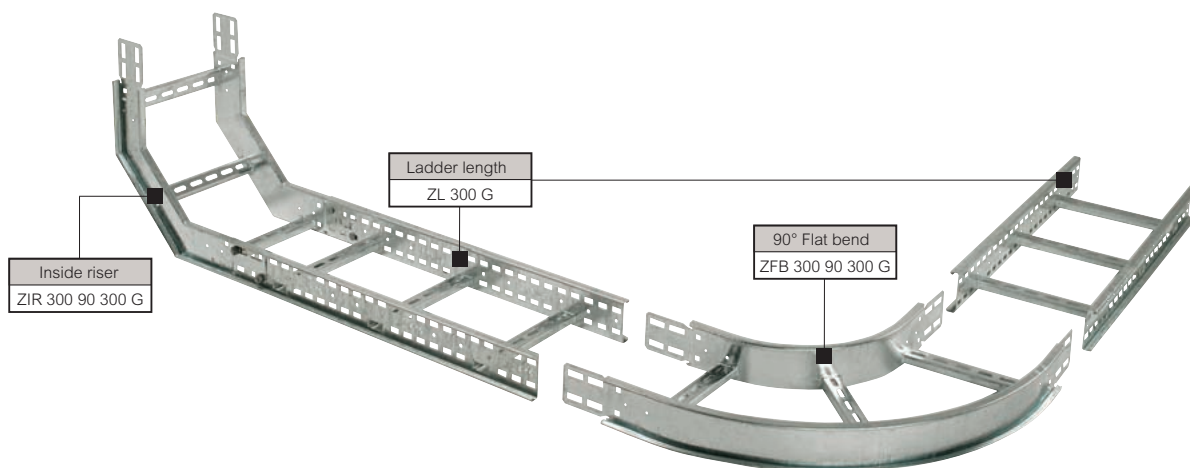

Selection chart (p. 10-11)

Dimensions and technical information : lengths (p. 34) ; coupler sets (p. 38-45) ; fittings (p. 46-73)

Design notes (p. 112)

Loading graphs (p. 34)

When connecting fittings to straight lengths, use fastener sets (see below)

Rung spacing : 300 mm between centres


Standard radius for fittings : 300 and 600 mm

Pack	Cat. Nos.	Straight lengths – 3 m
1	ZL 150 F	150 mm width
1	ZL 300 F	300 mm width
1	ZL 450 F	450 mm width
1	ZL 600 F	600 mm width
1	ZL 750 F	750 mm width
1	ZL 900 F	900 mm width

For technical information, see p. 34

1	ZC F	Coupler sets Straight length to straight length Supplied in pairs, with fasteners (4 per coupler) Use to couple straight lengths to straight lengths For technical information, see p. 38-39
1	ZFC F	Fitting to fitting Supplied in pairs, with fasteners (4 per coupler) Use to couple fitting to fitting For technical information, see p. 44-45

50	LFGM10P50	Fastener sets Comprise M10 coach bolt and flange nut Hot dip galvanised Stainless steel
50	LFSM10P50	



Pack	Cat. Nos.	Fittings
1	ZFB WArF	Flat bends For technical information, see p. 46-49 90° Flat bend 60° Flat bend 45° Flat bend 30° Flat bend
1	ZIR WArF	Inside risers For technical information, see p. 50, 53, 56, 59 90° Inside riser 60° Inside riser 45° Inside riser 30° Inside riser
1	ZOR WArF	Outside risers For technical information, see p. 50, 53, 56, 59 90° Outside riser 60° Outside riser 45° Outside riser 30° Outside riser