


# niglon


## Cable Management

# CPVC25B2 Contractor Pack

## Black

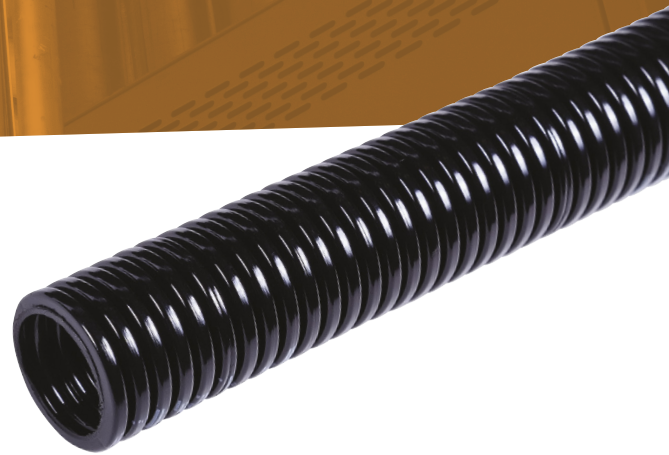

### KCPG25B Technical Drawing

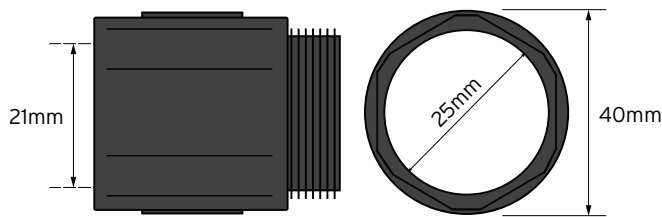

### Flexible Conduit Technical Drawing



### KCPG25B Technical Specifications

Trade Size	25
Outer Diameter	25mm
Inner Diameter	21mm
Thread Size	M25
Min & Max Temp. Range	-5 to 90°C
IP Rating	IP40
Lock nut included	M25
Material	Poly/PVC
Quantity	10

### Flexible Conduit Technical Specifications

Material	Polypropylene
Impact Resistance	Light 1 Joule at 5°C
Trade Size	25
Coil Length	10m
Temp Range	-5 to 90°C
Isolation	IP40
Standards	EN50086.1 EN50086.22 Superseded by EN61386.1 and EN61386.22
Crush Resistance	320N
Colour	Black