


Suspension hook for perfored bands 25 mm stainless steel (x 50)

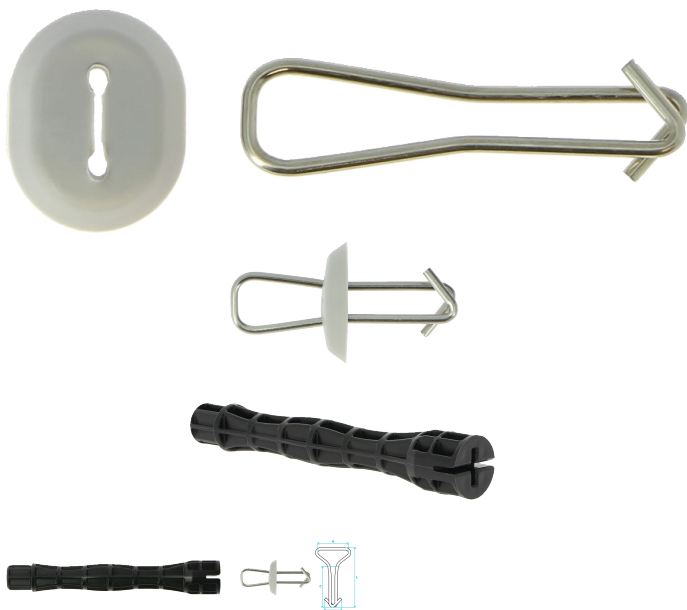

Caracteristics

L (mm) : 50
A (mm) : 26
C (mm) : 33
Drilling Ø (mm) : 8
Drilling depth (mm) : 30
Tear-out resistance concrete (daN*) : 90
Maximum width of perforated band (mm) : 25
Quantity per box : 50

Materials

- ✓ Solid materials
- ✓ Concrete

Benefits

- Quick and easy to install.
- Economical: no dowel required.
- Installation tool provided.



GENERAL INFORMATION

- **Technical details**
A2 stainless steel.

- **Application(s)**
For suspension of dropped ceilings, ventilation ducts and lighting.
BIZ 710 324: enables fixing of strips and perforated bands up to 25 mm wide.
BIZ 710 328: enables fixing of cables, hooks and chains up to 9 mm wide.
Hangs on concrete, slabs, solid bricks, paving stones and stonework.

- **Instructions**
 1. Drill at Ø 8 mm (minimum depth: 30 mm).
 2. Hammer in the hook using the installation tool until flush.
 3. Insert the material to be suspended into the hook.



LOGISTIC INFORMATION

Packaging



Plastic box

Height (cm) : 3,7
Length (cm) : 22,6
Depth (cm) : 8
Net weight (kg) : 0,184
Gross weight (kg) : 0,24



Outer package 1



Carton box

Height (cm) : 14,5
Length (cm) : 40
Depth (cm) : 29,6
Net weight (kg) : 2,949
Gross weight (kg) : 4,197



Outer package 2



Pallet

Height (cm) : 100
Length (cm) : 120
Depth (cm) : 80
Net weight (kg) : 141,542
Gross weight (kg) : 223,456

