


Suspension hook 9 mm and cap stainless steel (x 200)

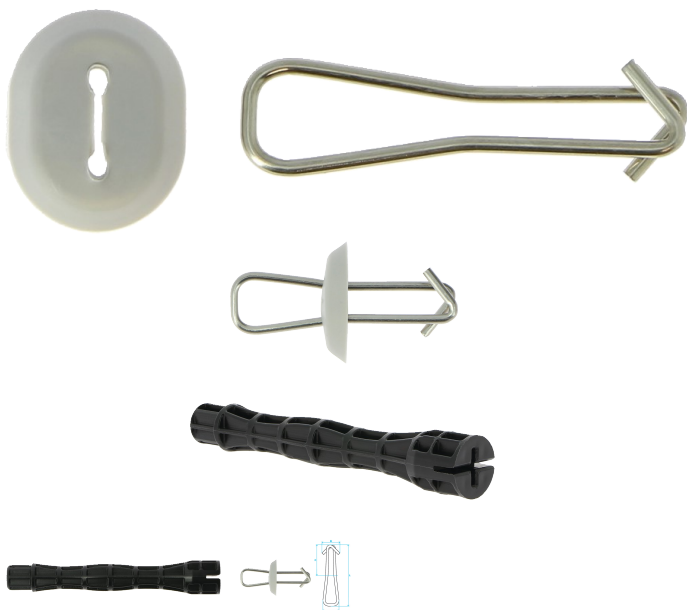

Caracteristics

L (mm) : 50
A (mm) : 13
C (mm) : 25
Drilling Ø (mm) : 8
Drilling depth (mm) : 30
Tear-out resistance concrete (daN*) : 90
Maximum width of perforated band (mm) : 8
Quantity per box : 200

Materials

- ✓ Solid materials
- ✓ Concrete

Benefits

- Quick and easy to install.
- Economical: no dowel required.
- Installation tool provided.

GENERAL INFORMATION

- **Technical details**
A2 stainless steel.

- **Application(s)**
For suspension of dropped ceilings, ventilation ducts and lighting.
BIZ 710 324: enables fixing of strips and perforated bands up to 25 mm wide.
BIZ 710 328: enables fixing of cables, hooks and chains up to 9 mm wide.
Hangs on concrete, slabs, solid bricks, paving stones and stonework.

- **Instructions**
 1. Drill at Ø 8 mm (minimum depth: 30 mm).
 2. Hammer in the hook using the installation tool until flush.
 3. Insert the material to be suspended into the hook.

LOGISTIC INFORMATION

Packaging



Carton box

Height (cm) : 9
Length (cm) : 18
Depth (cm) : 14,5
Net weight (kg) : 0,73
Gross weight (kg) : 0,8



Outer package 1



x 6.00

Carton box

Height (cm) : 20
Length (cm) : 40
Depth (cm) : 30
Net weight (kg) : 4,36
Gross weight (kg) : 5,32

